

Superior Solutions for Sheet Metal Fabricators

HIGH PERFORMANCE TOOLING SYSTEMS FOR TRUMPF STYLE PRESSES

- MATE NEXT™
- MATE QUICKLOCK™
- MATE TRUMPF STYLE



PN 2011

WORLDWIDE HEADQUARTERS:

1295 Lund Boulevard, Anoka, Minnesota 55303 USA

Tel 763.421.0230 Fax 763.421.0285

mate.com



MACHINE GROUP MODEL CLASSIFICATION

	<u>Non Keyed</u>	<u>Keyed</u>	<u>Rotational</u>	<u>Minimatic</u>
	<u>A</u>	<u>E</u>	<u>H</u>	<u>S</u>
	CN 700	400	190R	100
	CN 900	150K	200R	120R
	CN 701	151K	500R	160
	CN 901	152K	600L	
		180K		
	<u>B</u>	180.2K	<u>I</u>	
	CN 901E	180KD	2000R	
	CN 902	180LK	2010R	
	CS 75	180.2LK	2020R	
	CS 75.2	202K	5000R	
		225K	6000L	
	<u>C</u>	235K	3000	
	CN 1200S	300K	3000L	
	CN 1200A	300LK		
	CS 15	300PK		
	CS 20	400K		
	CS 20A			
	MP 25	<u>F</u>		
	MP 25D	150W		
		152W		
	<u>D</u>	180W		
	20	180.2W		
	20A	180R		
	202M	180LW		
		180.2LW		
	<u>G</u>	ELX/SWIFT		
	Trumatic	185		
		240		
		240R		
		250		
		260R		
Alignment Rings				
Size 1	VANTD	VANTE	VANTE	VANTM
Size 2 and 3	VAPTD	VAPTE	VAPTE	-
Heavy Duty	-	VANTF	VANTF	-
Size 1-X	-	-	-	VAPTM
QuickLock™ Alignment Ring				
Size 1 and 2	-	MATE00480	MATE00480	-
NEXT™ Tool Holders				
Size 40	-	MATE00371	MATE00371	-
Size 76	-	MATE00372	MATE00372	-
Stripper Styles				
Size 1	SNT1	SKT1	SRT1	SKTX
Size 2 and 3	SNT2	SKT2	SRT2	-
Size 3	SNT3	SKT3	-	-
Size 1-X	-	-	-	SKTX



TABLE OF CONTENTS

Mate Precision Tooling is the leading manufacturer of original and replacement tooling for Amada, Danobat, Euromac, Prima Finn-Power, LVD Strippit, Murata Wiedemann, Salvagnini, Nisshinbo, Trumpf, and other punch press machines.

Mate has been there from the beginning with products, service, and solutions. For the past five decades, Mate has led the tooling industry in quality, price, delivery, and service. This dedication and expertise result in products that are long lasting, reliable and productive.

Mate's products and services are aimed at just one thing: helping customers manufacture sheet metal parts as productively and efficiently as possible. All Mate products are 100% unconditionally customer satisfaction guaranteed. Standard tooling or special requests – anywhere in the world, Mate is there. Call us today, we look forward to working with you.

Dean A. Sundquist
Chairman and CEO



	Introduction	2-3
	Tooling System Overview	4-5
	Maxima™ Coating and Slug Free® Dies	6
Section 1	Trumpf Style Tooling System	7
	Round	8
	Rectangle	9
	Shaped	10
	Square	11
	Alignment Rings	12
	Accessories	13
	Minimatic Tooling System	14
	Heavy Duty Tooling System	15
Section 2	Multitool System	
	5-Station	16
	10-Station	17
	4-Station	18
	6-Station	19
Section 3	Mate NEXT™ Tooling System	20-21
	Round	22
	Rectangle	23
	Shaped	24
	Square	25
Section 4	Mate QuickLock™ Tooling System	26-27
	Round	28
	Rectangle	29
	Shaped	30
	Square	31
Section 5	Mate Eurostyle™ Tooling System	32-33
	Mate Longlife™ Tooling System	34
	M4PM Tool Steel	35
Section 6	Special Applications and Accessories	
	Special Shape Drawings	36-37
	Tooling Add-ons	38
	EasyView O-Rings	39
	Special Applications Price List	40-42
	Special Applications Available in Stock	43
	Special Applications	44-54
Section 7	Technical Data	
	Angle Settings	55-56
	Critical Tool Dimensions	57



MATE TOOLING SYSTEMS FOR TRUMPF STYLE PUNCH PRESSES

Mate offers the most comprehensive range of tooling systems designed to accommodate any punching application in your Trumf style punch press. Use this simple chart to determine which tooling system is right for your typical punching application.

<p>← LESS → MORE →</p> <p>• •• ••• ••••</p>	Mate NEXT™ Tooling System	Mate QuickLock™ Tooling System	Mate Trumf Style Tooling System
Overall Value – The combination of: the features, the purchase price, and the operating costs.	••••	•••	••
Cost Savings – The ongoing cost savings of operating the tooling system over an extended period of time.	••••	•••	••
Ease of Use – Design features that make it faster to install, simpler for the operator to set up, and more convenient to maintain.	••••	•••	••
Interchangeability – The ability of a tooling system to be compatible with popular systems from other major suppliers.	•••	•••	••••
Quick Set-up – Integral features which enable tools to be changed quickly and accurately, thus maximizing machine up time.	••••	•••	••
Grind Life – The sum of the number of holes punched between regrinds AND the total useable length of the punch tip.	••••	•••	•••
Features – Elements of a system that make it simple to use, easy to maintain, extend service life, and increase productivity.	••••	•••	••
Purchase Price – The initial purchase price of the system.	•••	••	••

Mate Trumf Style Tooling System

The Mate Trumf Style Tooling System is designed to enable fabricators to produce high quality piece parts, economically. Features include:

Standard System

- Alignment Ring: Shock-resistant tool steel for maximum accuracy and durability.
- Punches: Abrasion resistant High Speed Steel for increased tool life. 1/4-degree back taper for improved stripping performance.
- Urethane Strippers reduce punching noise and eliminate sheet marking.
- Metal Strippers: High-strength tool steel for superior strength and flatness.
- Dies: Wear-resistant tool steel with uniform corner clearance radii for improved die strength and enhanced piece part quality.

Maxima™ Coating:
Maxima Coating-Titanium Zirconium Nitride Ti(Zr)N coating is available for extreme applications to eliminate galling.

Slug Free® Dies:
Mate Slug Free® die geometry is available to eliminate slug pulling in extreme applications. Clearing the slug during each cycle improves piece part quality and extends tool life.



See Pages 7 – 11



Mate QuickLock™ Tooling System for Trumpf Style Presses

The Mate QuickLock™ tooling system for Trumpf style presses combines the economy of conventional Trumpf style tooling with the convenience of alignment via a keyed alignment ring. The keyed alignment ring engages the alignment key in the punch for quick tool alignment without an alignment fixture. This results in quicker tool set-ups and increased machine productivity.

Features include:

- High Speed Steel punches, with 1/4 degree back taper and near polished flanks for extended interval between regrinds.
- Punches include an alignment key for use with the Mate QuickLock alignment ring.
- Alignment ring with a keyway that engages the key on both Mate QuickLock size 1 and size 2 punches for quick and accurate tool alignment.
- Urethane strippers, in an extended size range, for quieter operation and improved piece part quality. Available as push-on or screw-on, depending on punch point size.
- Highly wear-resistant punches and dies for maximum productivity.



Convenience

See Pages 26 – 31

Mate NEXT™ Insert Tooling System for Trumpf Style Presses

The Mate NEXT™ Insert Tooling System for Trumpf style presses, is a high performance tooling system designed to maximize tool life, minimize tool set-up times, improve accuracy, reduce punching costs, and maximize productivity.

The Mate NEXT Insert Tooling System includes:

- Two sizes of insert punch holders with precision orientation features for quick tool change without alignment fixtures.
 - Size 40: 0.031(0.80) to 1.575(40.00)
 - Size 76: 1.575(40.00) to 3.000(76.20)
- Interchangeable, highly abrasion-resistant, punch inserts for exceptional interval between regrinds. Size 40 punch inserts use exclusive M4PM™ tool steel for longest tool life.
- Precision ground shims which return the punch insert to the original length after 0.118(3.00) has been removed during regrinding.
- Push-on urethane stripper for Size 40 punch holders provide positive on-the-die stripping without marking. Ideal for decorative material.



High Performance

See Pages 20 – 25

MAXIMA™ COATING / MATE SLUG FREE® DIES

Maxima™ Coating

Maxima is a premium tool steel coating that has been specially formulated for punch press tooling applications. Maxima is a multilayer Zirconium Titanium Nitride (ZrTiN) coating that is hard, wear resistant, and lubricious. It acts as a barrier between the punch and the sheet metal being punched and, because of its exceptional lubricity, greatly improves stripping.

Maxima is applied to the precision ground surface of Mate's premium tool steel punches. Maxima is an extremely hard, wear resistant, slippery material which reduces the friction that occurs during the stripping portion of the punching cycle, it is particularly good for abrasive tooling applications. Less friction means less heat build up, less galling, and longer tool life.




Mate Slug Free® Dies

Mate Slug Free® dies eliminate slug pulling. Slug pulling is a condition where the slug returns to the top of the sheet during the stripping portion of the punching cycle. The slug comes between the punch and the top of the sheet on the next cycle. This causes damage to the piece part and the tooling. Slug Free dies eliminate this problem.

The Slug Free die has been designed with an opening that has a constriction point below the surface so the slug cannot return once it passes this point. Once the slug is separated from the punch, it is free to fall away from the punching area. Slug pulling is eliminated.

For more information visit www.mate.com/slugfree

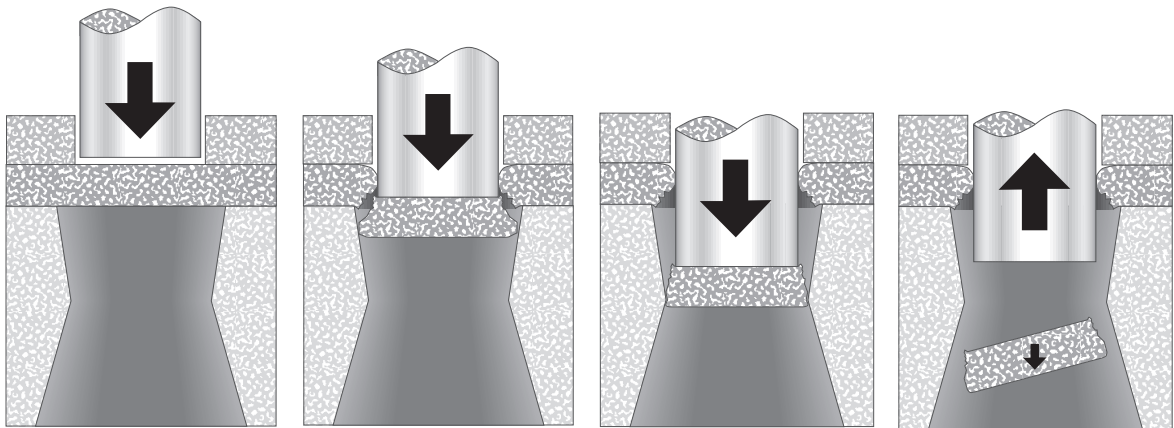

Material held securely by stripper before punch makes contact.

Punch penetrates the material. Slug fractures away from sheet.

Pressure point constricts slug. Punch stroke bottoms out as slug squeezes past pressure point.

Punch retracts and slug is free to fall down and away through exit taper of the Slug Free® die.

Slug Free® Dies:

- Eliminate slug pulling
- Reduce tool breakage
- Improve tool life
- Increase quality




PRODUCT FEATURES AND BENEFITS

The sum of all of the features and benefits of each Mate product guarantee superior performance in every punching application. Here are just some of the features that make this a true statement.


Alignment Rings

- Precision machined and ground for accurate tool alignment.
- High impact-resistant steel to maintain superior flatness and durability.




Punches

- Premium high speed tool steel for longer tool life.
- 1/4° back taper and near polished flanks to reduce friction and eliminate galling.
- Minute corner radii on punch point to reduce chipping.
- Single point turned radii at base of punch point to reduce stress.
- Solid surface contact with alignment ring for superior alignment.
- Superior tolerances and surface finishes.
- 0.118 (3.00) grind life in 0.250 (6.35) material.
- Three replacement lengths (small, long, extra-long)

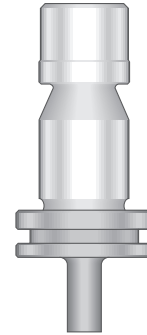

Urethane Strippers

- Quiet.
- Cushions impact.
- Eliminates sheet rattle.
- Safe: will not shatter.
- Non-Marring even on polished aluminum.
- Improved flatter sheets, no puckering.
- Positive stripping keeps sheets from moving.

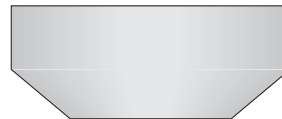

Strippers

- Keyed, non-keyed, and rotational based on machine group
- High strength tool steel, will not deform or break.



Dies

- High chrome air hardened tool steel.
- 0.059 (1.50) grind life.
- Double-cut die opening to improve die strength.
- Uniform clearance radii in die corners.
- Precision slot orientation–die opening orientation and slot cut in single operation to improve accuracy.
- Improved die strength: Domed relief in size 1 and Stress Free® relief in size 2.
- Superior roundness and flatness.



Die Adapters

- Permits Size 1 dies to be used in machines with Size 2 die bases.
- Precision machined in shock resistant tool steel for greater accuracy, superior machine fit, and longer life.

SECTION 1


Dimensions in inches (millimeters)



TRUMPF STYLE TOOLING

ROUND SIZE 0, 1, 2, 3

Size 0-A




Size 0-B




Size 1



Size 2



Size 3



ROUND PUNCHES

Size	Range	Part Number	Without Shear	Whisper Shear	Rooftop Shear	Maxima™ Coating – Add
Size 0-A	0.030 (0.76) to 0.236 (5.99)	PATA0A				
Size 0-B	0.237 (6.02) to 0.413 (10.49)	PATB0A				
Size 1	0.030 (0.76) to 1.181 (30.00)	PATD0A				
Size 2-A	1.182 (30.02) to 2.125 (53.97)	PATE0A				
Size 2-B	2.126 (53.98) to 3.0063 (76.36)	PATF0A				
Size 3	3.006 (76.36) to 4.134 (105.00)	PATJ0A				


ROUND MACHINE STRIPPERS

Size	Keyed	Non-Keyed	Rotational
Size 0	SKT00A	SNT00A	SRT00A
Size 1	SKT10A	SNT10A	SRT10A
Size 2	SKT20A	SNT20A	SRT20A
Size 3	SKT30A	SNT30A	N/A

PUSH-ON URETHANE STRIPPERS*

Size	Inside Diameter	Part Number	Size
0-A	0.250 (6.35)	TP0A00US	
Size 0-B	0.430 (10.92)	TP0B00US	
Size 1	0.590 (14.98)	TP0106US	
Size 1	0.890 (22.60)	TP0109US	
Size 1	1.065 (27.05)	TP0112US	

*For short (74,0) length;
Custom molding available for most sizes



Type (Group)

Non-Keyed (A through D & G)

Keyed (E & F)

Rotational (H & I)



Size 1



Size 2



Size 3

ROUND DIES

Size	Range	Part Number
Size 1	1.181(30.00) +0.079(2.00) Opening	D0T100
Size 2	3.000(76.20) +0.079(2.00) Opening	D0T200
Size 3	4.134(105.00) +0.079(2.00) Opening	D0T300

DISCOUNTS ON ALL MATE TRUMPF STYLE TOOLING
10% discount on orders between \$500 and \$1499
15% discount on orders \$1500 and over

See Pages 12 – 13 for

- Punch Chucks
- Alignment Rings
- Die Adapters

See Page 57 for critical tool dimensions



TRUMPF STYLE TOOLING RECTANGLE SIZE 0, 1, 2, 3

Size 0-A




Size 0-B




Size 1



Size 2



Size 3



RECTANGLE PUNCHES

Size	Range	Part Number	Without Shear	Whisper Shear	Rooftop Shear	Maxima™ Coating – Add
Size 0-A	0.030 (0.76) to 0.236 (5.99)	PATA1A				
Size 0-B	0.237 (6.02) to 0.413 (10.49)	PATB1A				
Size 1	0.030 (0.76) to 1.181 (30.00)	PATD1A				
Size 2-A	1.182 (30.02) to 2.125 (53.97)	PATE1A				
Size 2-B	2.126 (53.98) to 3.0063 (76.36)	PATF1A				
Size 3	3.006 (76.36) to 4.134 (105.00)	PATJ1A				


ROUND MACHINE STRIPPERS

Size	Keyed	Non-Keyed	Rotational
Size 0	SKT01A	SNT01A	SRT01A
Size 1	SKT11A	SNT11A	SRT11A
Size 2	SKT21A	SNT21A	SRT21A
Size 3	SKT31A	SNT31A	N/A

PUSH-ON URETHANE STRIPPERS*

Size	Inside Diameter	Part Number
Size 0-A	0.250 (6.35)	TP0A00US
Size 0-B	0.430 (10.92)	TP0B00US
Size 1	0.590 (14.98)	TP0106US
Size 1	0.890 (22.60)	TP0109US
Size 1	1.065 (27.05)	TP0112US

*For short (74,0) length;
Custom molding available for most sizes

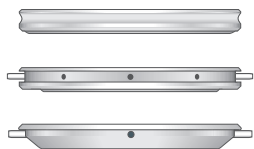

Type (Group)

Non-Keyed (A through D & G)

Keyed (E & F)

Rotational (H & I)



Size 1



Size 2



Size 3

RECTANGLE DIES

Size	Range	Part Number
Size 1	1.181(30.00) +0.079(2.00) Opening	DOT110
Size 2	3.000(76.20) +0.079(2.00) Opening	DOT210
Size 3	4.134(105.00) +0.079(2.00) Opening	DOT310

Dimensions in inches (millimeters)



TRUMPF STYLE TOOLING STANDARD SHAPE SIZE 0, 1, 2, 3

Size 0-A




Size 0-B




Size 1



Size 2



Size 3



SHAPED PUNCHES

Size	Range	Part Number	Without Shear	Whisper Shear	Rooftop Shear	Maxima™ Coating – Add
Size 0-A	0.030 (0.76) to 0.236 (5.99)	PATA_A				
Size 0-B	0.237 (6.02) to 0.413 (10.49)	PATB_A				
Size 1	0.030 (0.76) to 1.181 (30.00)	PATD_A				
Size 2-A	1.182 (30.02) to 2.000 (50.80)	PATE_A				
Size 2-B	2.001 (50.83) to 3.0063 (76.36)	PATF_A				
Size 3	3.006 (76.36) to 4.134 (105.00)	PATJ_A				

SHAPED MACHINE STRIPPERS

Size	Keyed	Non-Keyed	Rotational
Size 0	SKT0_A	SNT0_A	SRT0_A
Size 1	SKT1_A	SNT1_A	SRT1_A
Size 2	SKT2_A	SNT2_A	SRT2_A
Size 3	SKT3_A	SNT3_A	N/A

PUSH-ON URETHANE STRIPPERS*

Size	Inside Diameter	Part Number
Size 0-A	0.250 (6.35)	TP0A00US
Size 0-B	0.430 (10.92)	TP0B00US
Size 1	0.590 (14.98)	TP0106US
Size 1	0.890 (22.60)	TP0109US
Size 1	1.065 (27.05)	TP0112US

*For short (74,0) length;

Custom molding available for most sizes

Type (Group)



Non-Keyed (A through D & G)



Keyed (E & F)




Rotational (H & I)



Size 1



Size 2




Size 3

SHAPED DIES

Size	Range	Part Number
Size 1	1.181(30.00) +0.079(2.00) Opening	DOT1_0
Size 2	3.000(76.20) +0.079(2.00) Opening	DOT2_0
Size 3	4.134(105.00) +0.079(2.00) Opening	DOT3_0

*STANDARD SHAPES

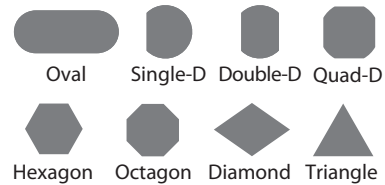

TRUMPF STYLE TOOLING

SQUARE SIZE 0, 1, 2, 3

Size 0-A




Size 0-B




Size 1



Size 2



Size 3



SQUARE PUNCHES

Size	Range	Part Number	Without Shear	Whisper Shear	Rooftop Shear	Maxima™ Coating – Add
Size 0-A	0.030 (0.76) to 0.236 (5.99)	PATA3A				
Size 0-B	0.237 (6.02) to 0.413 (10.49)	PATB3A				
Size 1	0.030 (0.76) to 1.181 (30.00)	PATD3A				
Size 2-A	1.182 (30.02) to 1.768 (44.90)	PATE3A				
Size 2-B	1.769 (44.91) to 3.0063 (76.36)	PATF3A				
Size 3	3.006 (76.36) to 4.134 (105.00)	PATJ3A				

SQUARE MACHINE STRIPPERS

Size	Keyed	Non-Keyed	Rotational
Size 0	SKT03A	SNT03A	SRT03A
Size 1	SKT13A	SNT13A	SRT13A
Size 2	SKT23A	SNT23A	SRT23A
Size 3	SKT33A	SNT33A	N/A

PUSH-ON URETHANE STRIPPERS*

Size	Inside Diameter	Part Number
Size 0-A	0.250 (6.35)	TP0A00US
Size 0-B	0.430 (10.92)	TP0B00US
Size 1	0.590 (14.98)	TP0106US
Size 1	0.890 (22.60)	TP0109US
Size 1	1.065 (27.05)	TP0112US

*For short (74,0) length;

Type (Group) Custom molding available for most sizes



Non-Keyed (A through D & G)



Keyed (E & F)



Rotational (H & I)



Size 1



Size 2



Size 3

SQUARE DIES

Size	Range	Part Number
Size 1	1.181(30.00) +0.079(2.00) Opening	DOT130
Size 2	3.000(76.20) +0.079(2.00) Opening	DOT230
Size 3	4.134(105.00) +0.079(2.00) Opening	DOT330












SECTION 1

See Page 57 for critical tool dimensions

DISCOUNTS ON ALL MATE TRUMPF STYLE TOOLING
 10% discount on orders between \$500 and \$1499
 15% discount on orders \$1500 and over



ALIGNMENT RINGS


<p>Size 1 Manual Tool Change VANTD (RECESSED)</p> 	<p>Sizes 2 and 3 Manual Tool Change VAPTD</p> 	<p>Replacement Dowel 8 x 16mm DPI17304* For all Sizes</p> 
<p>Size 1 Automatic Tool Change VANTE (RECESSED)</p> 	<p>Sizes 2 and 3 Automatic Tool Change VAPTE</p> 	<p>Alignment Key For all Sizes VKETE000</p> 
<p>Size 1 Minimatic VANTM (RECESSED)</p> 	<p>Size 1-X Minimatic VAPTM</p> 	<p>Alignment Key For Minimatic VKETM000</p> 
<p>Size 1 and 2 Heavy Duty VANTF</p> 		<p>Alignment Key For Heavy Duty VKETF000</p> 

DISCOUNTS ON ALL MATE TRUMPF STYLE TOOLING
 10% discount on orders between \$500 and \$1499
 15% discount on orders \$1500 and over




ACCESSORIES


Size 0-A Punch Chuck
VINTS010



Sizes 0-B Punch Chuck
VINTS020




Punch Chuck Set Screw
VINSSS




Size 2 Die Adapter
Accepts Size 1 Dies
MAT20000



Size 3 Die Adapter
Accepts Size 2 Dies
MAT30000



Size 3 Die Adapter
Accepts Size 1 Dies
MAT40000



Size 1 Die Shim Pack
2x 0.004(0.1) Thickness
1x 0.012(0.30) Thickness
1x 0.024(0.60) Thickness
MST1020



Size 2 Die Shim Pack
2x 0.004(0.1) Thickness
1x 0.012(0.30) Thickness
1x 0.024(0.60) Thickness
MST2020



Size 1 Die Shims
0.004(0.1) Thickness MST1004 (6 minimum)
0.012(0.30) Thickness MST1012 (6 minimum)
0.020(0.50) Thickness MST1020 (6 minimum)

Size 2 Die Shims
0.004(0.1) Thickness MST2004 (6 minimum)
0.012(0.30) Thickness MST2012 (6 minimum)
0.020(0.50) Thickness MST2020 (6 minimum)


Size 3 Keyed Stripper Adapter
SKT3H000



Size 3 Keyed Stripper Adapter
SNT3H000



Die Slot Plug
MKPT000




Dimensions in inches (millimeters)



MINIMATIC TOOLING SYSTEM

MINIMATIC HSS PUNCHES - PUNCH CHUCKS

SIZE 0-A PART NUMBER




Punch Chuck Setscrew VINSSS
Size 0-A Punch Chuck VINTS010

(0-3) d, .030-.236 (0.77-6.00)
(3) a, .167(4.24)

- PATA0A
- PATA1A
- PATA2A
- PATA3A

Optional Push-On Stripper, .250(6.35) I.D. TP0A00US

SIZE 0-B




Punch Chuck Setscrew VINSSS
Size 0-B Punch Chuck VINTS020

(0-3) d, .237-.413 (6.01-10.50)
(3) a, .292(7.42)

- PATB0A
- PATB1A
- PATB2A
- PATB3A

Optional Push-On Stripper, .430(10.92) I.D. TP0B00US

SIZE 1




(0-3) d, .030-1.181 (0.77-30.00)
(3) a, .837(21.27)

- PATD0A
- PATD1A
- PATD2A
- PATD3A

Optional Push-On Stripper, .590(14.98) I.D. TP0106US
Optional Push-On Stripper, .890(22.60) I.D. TP0109US
Optional Push-On Stripper, 1.065(27.05) I.D. TP0112US

SIZE 1-X



(0-3) d, 1.182-1.500 (30.01-38.10)
(3) a, 1.062(26.98)

- PATX0A
- PATX1A
- PATX2A
- PATX3A

TRUMPF MACHINES THAT USE MINIMATIC STYLE TOOLS



TRUMATIC
100
100M
120
160



TRUMATIC
100
100M
120
160

MINIMATIC STRIPPERS

SIZE 1 PART NUMBER

1.181 + .060(30.00 + 1.52) maximum



- SKTX0A
- SKTX1A
- SKTX2A
- SKTX3A

SIZE 1-X

1.500 + .060(38.10 + 1.52) maximum



- SKTX0A
- SKTX1A
- SKTX2A
- SKTX3A

MINIMATIC DIES

SIZE 1 PART NUMBER

1.181 + .079(30.00 + 2.00)

Maximum Actual Die Opening



- DOT100
- DOT110
- DOT120
- DOT130

SIZE 1-X

1.500 + .039(38.10 + 1.00)

Maximum Actual Die Opening




- DOTX00
- DOTX10
- DOTX20
- DOTX30

MINIMATIC ALIGNMENT RINGS

SIZE 1 PART NUMBER


(0-3) d, .030 - 1.181 (0.77 - 30.00)



VANTM

SIZE 1-X

(0-3) d, 1.182 - 1.500 (30.01 - 38.10)




VAPTM



HEAVY DUTY TOOLING

HEAVY DUTY HSS PUNCHES

SIZE 1 PART NUMBER



(0-3) .250-1.181*
(6.35-30.00)
(3) .842(21.39)

- PHTD0A
- PHTD1A
- PHTD2A
- PHTD3A

*Punch width/diameter less than .250(6.35) NOT available in heavy duty style tooling

HEAVY DUTY DIES

SIZE 1 PART NUMBER

.984 + .059(24.99 + 1.49)
Maximum Actual Die Opening



- D4T100
- D4T110
- D4T120
- D4T130


"Without Shear" and "Rooftop" are valid shear options for Size 1 punches less than or equal to 1.81(30.00).

"Without Shear" and "Whisper" are valid shear options for Size 1 punch inserts greater than 1.81(30.00).

SIZE 2-A

- (0) 1.182-1.625
(30.01-41.27)
- (1) 1.182-2.125
(30.01-53.97)
- (2) 1.182-2.000
(30.01-50.80)
- (3) 1.182-1.768
(30.01-44.90)
- (3) 1.256(31.91)

- PHTE0A
- PHTE1A
- PHTE2A
- PHTE3A



SIZE 2-B

- (0) d, 1.626-3.000
(41.28-76.20)
- (1) d, 2.126-3.000
(53.98-76.20)
- (2) d, 2.001-3.000
(50.81-76.20)
- (3) d, 1.769-3.000
(44.91-76.20)
- (3) a, 2.132(54.15)

- PHTF0A
- PHTF1A
- PHTF2A
- PHTF3A

*Punch width/diameter less than .250(6.35) NOT available in heavy duty style tooling

SIZE 2

2.047 + .079(52.00 + 2.00)
Maximum Actual Die Opening



- D4T200
- D4T210
- D4T220
- D4T230

"Without Shear" and "Whisper" are valid shear options for Size 2 punch inserts.

SIZE 3

4.134 + .079(105.00 + 2.00)
Maximum Actual Die Opening




- D0T300
- D0T310
- D0T320
- D0T330

Size 3 dies specify 0°, 90°, or special angle setting

STANDARD STRIPPERS ARE USED WITH THE HEAVY DUTY TOOLING SYSTEM, SEE PAGES 8-11 OF THIS CATALOG

HEAVY DUTY ALIGNMENT RING

SIZE 1-3 PART NUMBER



VANTF

TRUMPF MACHINE GROUPS BY ALIGNMENT RING STYLE

TRUMATIC 180W	235	300W
150K	180WD	240
150W	185	260
180K	200R	300K
180LK	202K	300LW
180LW	202W	300PK
180PK	225	300PW
		500R
		500L
		2000R
		5000

AUTOMATIC TOOL CHANGE




*Punch width/diameter less than .250(6.35) NOT available in heavy duty style tooling

SIZE 3

- (0-3) d, 3.001-4.134
(76.21-105.00)
- (3) a, 2.929(74.41)

- PHTJ0A
- PHTJ1A
- PHTJ2A
- PHTJ3A



KEY FOR HEAVY DUTY ALIGNMENT RING - ALL SIZES



(Not interchangeable with OEM) VKETF000



DISCOUNTS ON ALL MATE TRUMPF STYLE TOOLING
10% discount on orders between \$500 and \$1499
15% discount on orders \$1500 and over

Dimensions in inches (millimeters)



5-STATION MULTI TOOL SYSTEM

Punch Holder	MATE00559
Stripper	MATE00560
Die Holder	MATE00561

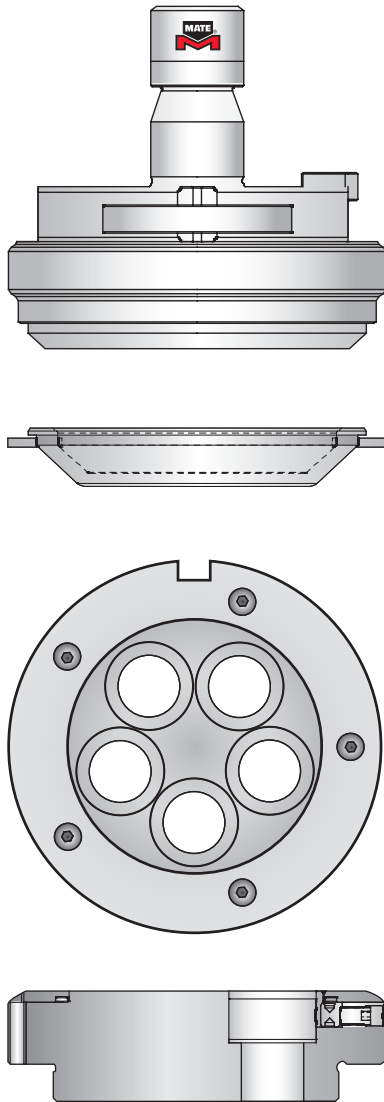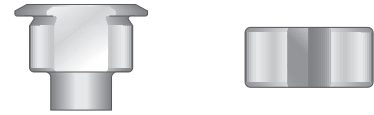

ROUND

Punch	0.030(0.76) to 0.630(16.00) Maxima™ Coating	PATV0A Add
Die	0.630(16.00) +0.024(0.60) Maximum Die Opening	DATV00

RECTANGLE

Punch	0.030(0.76) to 0.630(16.00) Maxima™ Coating	PATV1A Add
Die	0.630(16.00) +0.024(0.60) Maximum Die Opening	DATV10

SHAPED*

Punch	0.030(0.76) to 0.630(16.00) Maxima™ Coating	PATV_A Add
Die	0.630(16.00) +0.024(0.60) Maximum Die Opening	DATV_0

SQUARE

Punch	0.030(0.76) to 0.630(16.00) Maxima™ Coating	PATV3A Add
Die	0.630(16.00) +0.024(0.60) Maximum Die Opening	DATV30

Punches

- Premium particle metallurgy tool steel for exceptional interval between regrinds and maximum machine up time.
- 1/4 degree back taper and near polished punch flanks to reduce friction and extend tool life.
- Maxima™ coating available for extreme applications.

Dies


- High Speed Steel for extended life between regrinds.
- Uniform corner clearance radii for increased die strength and improved piece part quality.

Note: 5 and 10 Station Multi Tools are not compatible with 260A machines.



10-STATION MULTI TOOL SYSTEM

Punch Holder MATE00555
 Stripper MATE00556
 Die Holder MATE00550

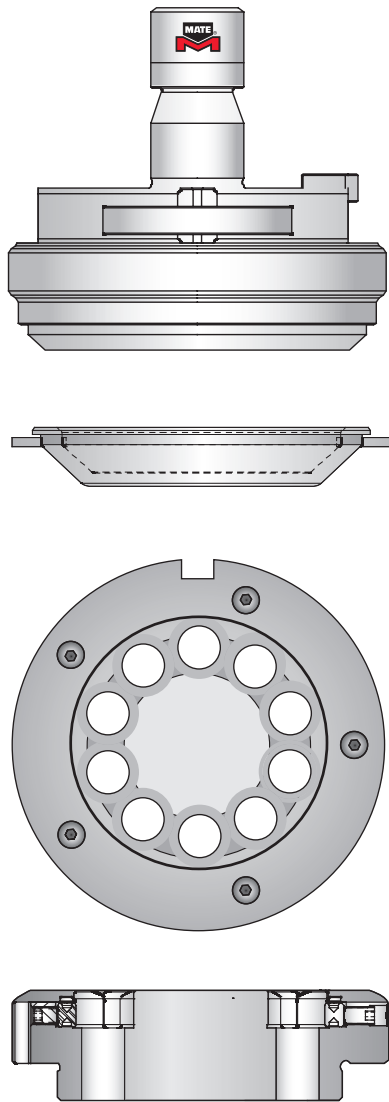

ROUND

Punch	0.030(0.76) to 0.413(10.49) Maxima™ Coating	PATT0A Add
Die	0.413(10.50) +0.024(0.60) Maximum Die Opening	DATT00

RECTANGLE

Punch	0.030(0.76) to 0.413(10.49) Maxima™ Coating	PATT1A Add
Die	0.413(10.50) +0.024(0.60) Maximum Die Opening	DATT10

SHAPED*

Punch	0.030(0.76) to 0.413(10.49) Maxima™ Coating	PATT_A Add
Die	0.413(10.50) +0.024(0.60) Maximum Die Opening	DATT_0

SQUARE

Punch	0.030(0.76) to 0.413(10.49) Maxima™ Coating	PATT3A Add
Die	0.413(10.50) +0.024(0.60) Maximum Die Opening	DATT30

Punches

- M4PM™ particle metallurgy High Speed Steel with excellent edge-wear resistance for exceptional interval between regrinds.
- 1/4 degree back taper and near polished punch flanks to reduce friction and extend tool life.
- Maxima™ coating available for extreme applications.

Dies

- High Speed Steel for maximum life between regrinds.
- Uniform corner clearance radii for increased die strength and improved piece part quality.


DISCOUNTS ON ALL MATE TRUMPF STYLE TOOLING
 10% discount on orders between \$500 and \$1499
 15% discount on orders \$1500 and over

Note: 5 and 10 Station Multi Tools are not compatible with 260A machines.



4-STATION MULTI TOOL TOOLING

1-PIECE PUNCH STYLE

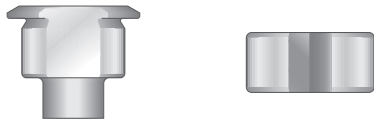

ROUND

Punch	0.030(0.76) to 0.630(16.00) Maxima™ Coating	PAT50A Add
Die	0.630(16.00) +0.024(0.60) Maximum Die Opening	D0T400

RECTANGLE

Punch	0.030(0.76) to 0.630(16.00) Maxima™ Coating	PAT51A Add
Die	0.630(16.00) +0.024(0.60) Maximum Die Opening	D0T410


SHAPED - SEE STANDARD SHAPES

Punch	0.030(0.76) to 0.630(16.00) Maxima™ Coating	PAT5_A Add
Die	0.630(16.00) +0.024(0.60) Maximum Die Opening	D0T4_0


SQUARE

Punch	0.030(0.76) to 0.630(16.00) Maxima™ Coating	PAT53A Add
Die	0.630(16.00) +0.024(0.60) Maximum Die Opening	D0T430

SHIM PACKAGE

Die	Shim Assortment 8x 0.004(0.10) 8x 0.012(0.03) 8x 0.024(0.60)	MST4 
-----	---	---

2-PIECE PUNCH STYLE

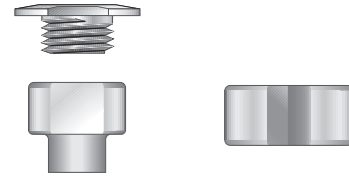

ROUND

Punch	0.030(0.76) to 0.630(16.00) Maxima™ Coating	PAT40A Add
Die	0.630(16.00) +0.024(0.60) Maximum Die Opening	D0T400

RECTANGLE

Punch	0.030(0.76) to 0.630(16.00) Maxima™ Coating	PAT41A Add
Die	0.630(16.00) +0.024(0.60) Maximum Die Opening	D0T410



SHAPED - SEE STANDARD SHAPES

Punch	0.030(0.76) to 0.630(16.00) Maxima™ Coating	PAT4_A Add
Die	0.630(16.00) +0.024(0.60) Maximum Die Opening	D0T4_0


SQUARE

Punch	0.030(0.76) to 0.630(16.00) Maxima™ Coating	PAT43A Add
Die	0.630(16.00) +0.024(0.60) Maximum Die Opening	D0T430

SHIM PACKAGE

Punch	Shim Assortment 6x 0.004(0.10) 6x 0.012(0.03) 6x 0.024(0.60) 6x 0.040(1.00)	VTST 
Die	Shim Assortment 8x 0.004(0.10) 8x 0.012(0.03) 8x 0.024(0.60)	MST4 



Punch Cap
PAT4CAP




6-STATION MULTI TOOL TOOLING

1-PIECE PUNCH STYLE

2-PIECE PUNCH STYLE

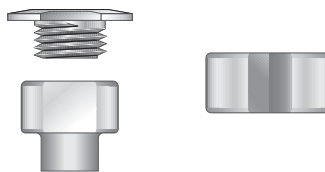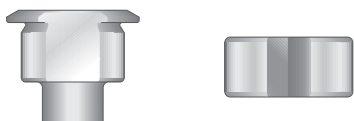

ROUND

Punch	0.030(0.76) to 0.413(10.49) Maxima™ Coating	PAT70A Add
Die	0.413(10.50) +0.024(0.60) Maximum Die Opening	D0T600

ROUND

Punch	0.030(0.76) to 0.413(10.49) Maxima™ Coating	PAT60A Add
Die	0.413(10.50) +0.024(0.60) Maximum Die Opening	D0T600

RECTANGLE

Punch	0.030(0.76) to 0.413(10.49) Maxima™ Coating	PAT71A Add
Die	0.413(10.50) +0.024(0.60) Maximum Die Opening	D0T610

RECTANGLE

Punch	0.030(0.76) to 0.413(10.49) Maxima™ Coating	PAT61A Add
Die	0.413(10.50) +0.024(0.60) Maximum Die Opening	D0T610

SHAPED*

Punch	0.030(0.76) to 0.413(10.49) Maxima™ Coating	PAT7_A Add
Die	0.413(10.50) +0.024(0.60) Maximum Die Opening	D0T6_0

SHAPED*

Punch	0.030(0.76) to 0.413(10.49) Maxima™ Coating	PAT6_A Add
Die	0.413(10.50) +0.024(0.60) Maximum Die Opening	D0T6_0


SQUARE

Punch	0.030(0.76) to 0.413(10.49) Maxima™ Coating	PAT73A Add
Die	0.413(10.50) +0.024(0.60) Maximum Die Opening	D0T630



SQUARE


Punch	0.030(0.76) to 0.413(10.49) Maxima™ Coating	PAT63A Add
Die	0.413(10.50) +0.024(0.60) Maximum Die Opening	D0T630

SHIM PACKAGE

Die	Shim Assortment 8x 0.004(0.10) 8x 0.012(0.03) 8x 0.024(0.60)	MST6 
-----	---	---

SHIM PACKAGE

Punch	Shim Assortment 6x 0.004(0.10) 6x 0.012(0.03) 6x 0.024(0.60) 6x 0.040(1.00)	VTST 
Die	Shim Assortment 8x 0.004(0.10) 8x 0.012(0.03) 8x 0.024(0.60)	MST6 

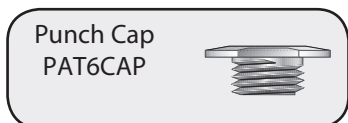

DISCOUNTS ON ALL MATE TRUMPF STYLE TOOLING
10% discount on orders between \$500 and \$1499
15% discount on orders \$1500 and over



Dimensions in inches (millimeters)



MATE NEXT™ INSERT TOOLING SYSTEM

The new NEXT™ Insert Tooling System for Trumpf style presses, is designed to dramatically increase tool life and reduce punching costs.

The NEXT™ Insert Tooling System includes:

- Interchangeable, abrasion-resistant, punch inserts
- Two sizes of insert punch holders with precision orientation features
- Precision ground punch shim returns the NEXT™ punch assembly to the original length after 0.118(3.00) has been removed during routine grinding.

SIZE 40

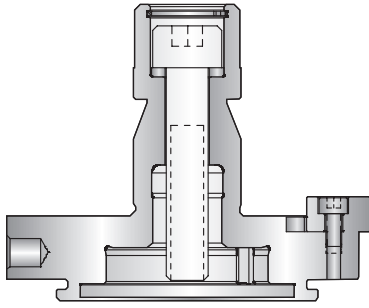

Insert Punch Holder
Available in two sizes.
Size 40 0.030-1.575(0.76-40.01)
Size 76 1.576-3.0063(40.03-76.36)

Precision Ground Shim

NEXT™ Punch Inserts
M4PM™ from 0.031(0.80) to 1.181(30.00)
M2 HSS from 1.182(30.01) to 3.000(76.20)




Push-on Urethane Stripper

The NEXT™ Insert Tooling System is fully compatible with existing strippers and dies.

High strength steel strippers for reliable operation.

High wear resistant steel dies for exceptional tool life.

SIZE 76

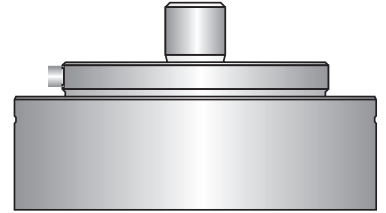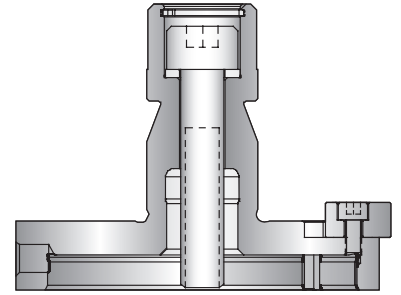

MATE NEXT™ INSERT TOOLING SYSTEM

The NEXT™ Insert Tooling System holders, with integral precision alignment features and captive draw bolt, accept interchangeable punch inserts for faster and more accurate machine set-ups.

Size 40 0.030(0.76) to 1.575(40.01)
 Size 76 1.576(40.03) to 3.0063(76.36)


M4 HSS from 0.031(0.80) to 1.181(30.00)
 M2 HSS from 1.182(30.01) to 3.000(76.20)
 High speed steel (HSS) NEXT™ punch inserts provides superior abrasion resistance to extend the interval between regrinds.

Precision ground punch shim returns the NEXT™ punch assembly to the original length after 0.118(3.00) has been removed during routine grinding.

Push-on urethane stripper for Size 40 punch insert holders provide positive on-the-die stripping without sheet marking. Ideal when punching soft or decorative materials.


High strength steel stripper for reliable operation.

High wear resistant steel die for exceptional tool life. Optional Slug Free® die geometry available.

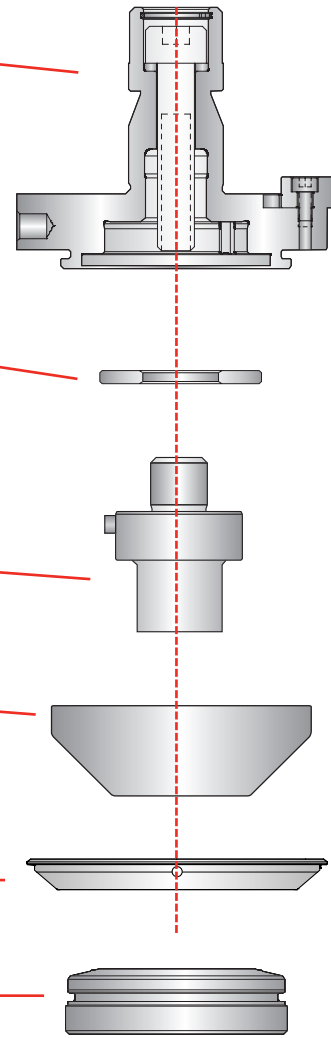


Mate NEXT™ Insert System Delivers Value!

The High Speed Steel punch inserts deliver exceptional edge wear resistance. The M4PM™ HSS Insert in sizes up to 0.031-1.181(0.80-30.00) delivers the longest possible interval between regrinds. In addition, by installing the shim after 0.118(3.00) has been removed from the punch during regrinding, the punch assembly is returned to its original length instead of being replaced. The result is that a single punch insert would last the same as multiple standard punches. The chart at right demonstrates the real value delivered by the NEXT™ Insert Tooling System from Mate.

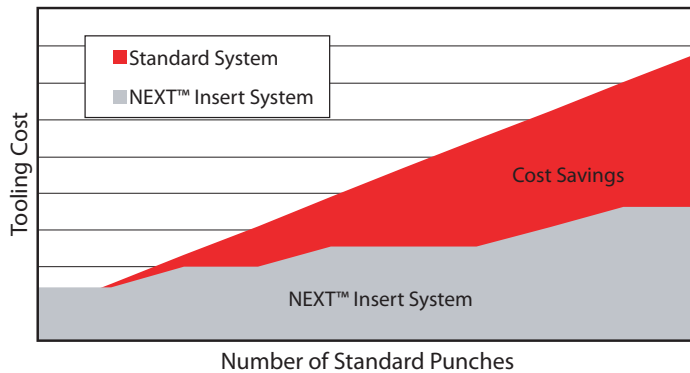

SECTION 3

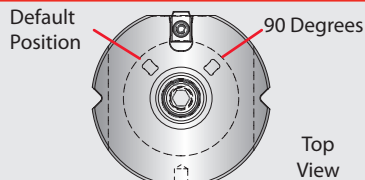


Torque Settings (Pre-set torque wrench recommended)
 6mm NEXT™ Holder Draw Bolt – 288 in-lbs (22Nm)
 6mm Alignment Ring Bolt – 132 in-lbs (15Nm)
 Punch Check Set Screw – 240 in-lbs (27Nm)

Dimensions in inches (millimeters)




MATE NEXT™ TOOLING SYSTEM ROUND SIZE 40 AND SIZE 76

SIZE 40



SIZE 76

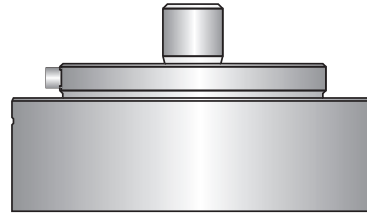

ROUND PUNCHES

Size	Range	Part Number	Without Shear	Whisper Shear	Maxima™ Coating – Add
Size 40	0.030 (0.76) to 1.181 (30.00)	PBTD0A			
Size 40	1.182 (30.02) to 1.575 (40.01)	PBTE0A			
Size 76	1.576 (40.03) to 2.205 (56.01)	PBTFOA			
Size 76	2.206 (56.03) to 2.599 (66.01)	PBTGOA			
Size 76	2.600 (66.04) to 3.0063 (76.36)	PBTH0A			

PUSH-ON URETHANE STRIPPERS

Size	Keyed	Rotational	Size	Inside Diameter	Part Number
Size 1	SKT10A	SRT10A	Size 40	0.984 (25.00)	MATE00374
Size 2	SKT20A	SRT20A	Size 40	1.181 (30.00)	MATE00375
			Size 40	1.378 (35.00)	MATE00376
			Size 40	1.575 (40.00)	MATE00377

Type (Group)



Keyed (E & F)



Rotational (H & I)



ROUND DIES

Size	Range	Part Number
Size 1	1.181(30.00) +0.079(2.00) Opening	DOT100
Size 2	3.000(76.20) +0.079(2.00) Opening	DOT200




Size 1



Size 2

PUNCH HOLDER AND SHIM

Size 40	Punch Holder with Shim	MATE00371
Size 40	Shim	MATE00364
Size 76	Punch Holder with Shim	MATE00372
Size 76	Shim	MATE00365
	Draw Bolt	SHC12191
	Snap Ring	SRI00001

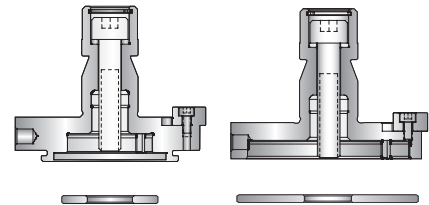


See Page 57 for critical tool dimensions




MATE NEXT™ TOOLING SYSTEM

RECTANGLE SIZE 40 AND SIZE 76

SIZE 40



SIZE 76

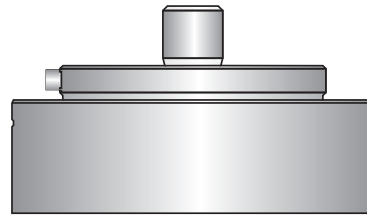

RECTANGLE PUNCHES

Size	Range	Part Number	Without Shear	Whisper Shear	Maxima™ Coating – Add
Size 40	0.030 (0.76) to 1.181 (30.00)	PBTD1A			
Size 40	1.182 (30.02) to 1.575 (40.01)	PBTE1A			
Size 76	1.576 (40.03) to 2.205 (56.01)	PBTF1A			
Size 76	2.206 (56.03) to 2.599 (66.01)	PBTG1A			
Size 76	2.600 (66.04) to 3.0063 (76.36)	PBTH1A			

RECTANGLE MACHINE STRIPPERS

Size	Keyed	Rotational
Size 1	SKT11A	SRT11A
Size 2	SKT21A	SRT21A

PUSH-ON URETHANE STRIPPERS

Size	Inside Diameter	Part Number	Size 40
Size 1	0.984 (25.00)	MATE00374	
Size 40	1.181 (30.00)	MATE00375	
Size 40	1.378 (35.00)	MATE00376	
Size 40	1.575 (40.00)	MATE00377	

Type (Group)



Keyed (E & F)



Rotational (H & I)



RECTANGLE DIES

Size	Range	Part Number
Size 1	1.181(30.00) +0.079(2.00) Opening	DOT110
Size 2	3.000(76.20) +0.079(2.00) Opening	DOT210




Size 1



Size 2

PUNCH HOLDER AND SHIM


Size 40	Punch Holder with Shim	MATE00371
Size 40	Shim	MATE00364
Size 76	Punch Holder with Shim	MATE00372
Size 76	Shim	MATE00365
	Draw Bolt	SHC12191
	Snap Ring	SRI00001

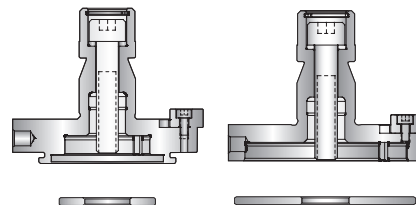


DISCOUNTS ON ALL MATE TRUMPF STYLE TOOLING
 10% discount on orders between \$500 and \$1499
 15% discount on orders \$1500 and over

MATE NEXT™ TOOLING SYSTEM STANDARD SHAPE SIZE 40 AND SIZE 76

SIZE 40



SIZE 76

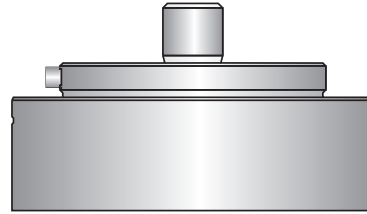

SHAPED PUNCHES

Size	Range	Part Number	Without Shear	Whisper Shear	Maxima™ Coating – Add
Size 40	0.030 (0.76) to 1.181 (30.00)	PBTD_A			
Size 40	1.182 (30.02) to 1.575 (40.01)	PBTE_A			
Size 76	1.576 (40.03) to 2.205 (56.01)	PBTF_A			
Size 76	2.206 (56.03) to 2.599 (66.01)	PBTG_A			
Size 76	2.600 (66.04) to 3.0063 (76.36)	PBTH_A			

SHAPED MACHINE STRIPPERS

Size	Keyed	Rotational
Size 1	SKT1_A	SRT1_A
Size 2	SKT2_A	SRT2_A

PUSH-ON URETHANE STRIPPERS

Size	Inside Diameter	Part Number
Size 40	0.984 (25.00)	MATE00374
Size 40	1.181 (30.00)	MATE00375
Size 40	1.378 (35.00)	MATE00376
Size 40	1.575 (40.00)	MATE00377

Type (Group)



Keyed (E & F)



Rotational (H & I)

SHAPED DIES

Size	Range	Part Number
Size 1	1.181(30.00) +0.079(2.00) Opening	DOT1_0
Size 2	3.000(76.20) +0.079(2.00) Opening	DOT2_0

PUNCH HOLDER AND SHIM



Size 40	Punch Holder with Shim	MATE00371
Size 40	Shim	MATE00364
Size 76	Punch Holder with Shim	MATE00372
Size 76	Shim	MATE00365
	Draw Bolt	SHC12191
	Snap Ring	SRI00001



Size 1



Size 2



*STANDARD SHAPES



Oval



Single-D



Double-D



Quad-D



Hexagon



Octagon



Diamond




Triangle




MATE NEXT™ TOOLING SYSTEM

SQUARE SIZE 40 AND SIZE 76

SIZE 40



SIZE 76

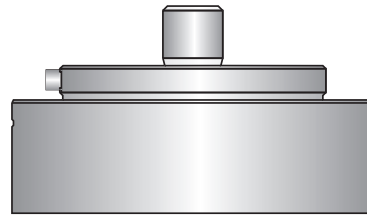

SQUARE PUNCHES

Size	Range	Part Number	Without Shear	Whisper Shear	Maxima™ Coating – Add
Size 40	0.030 (0.76) to 1.181 (30.00)	PBTD3A			
Size 40	1.182 (30.02) to 1.575 (40.01)	PBTE3A			
Size 76	1.576 (40.03) to 2.205 (56.01)	PBTF3A			
Size 76	2.206 (56.03) to 2.599 (66.01)	PBTG3A			
Size 76	2.600 (66.04) to 3.0063 (76.36)	PBTH3A			

SQUARE MACHINE STRIPPERS

Size	Keyed	Rotational
Size 1	SKT13A	SRT13A
Size 2	SKT23A	SRT23A

PUSH-ON URETHANE STRIPPERS

Size	Inside Diameter	Part Number
Size 40	0.984 (25.00)	MATE00374
Size 40	1.181 (30.00)	MATE00375
Size 40	1.378 (35.00)	MATE00376
Size 40	1.575 (40.00)	MATE00377

Type (Group)



Keyed (E & F)



Rotational (H & I)



SQUARE DIES

Size	Range	Part Number
Size 1	1.181(30.00) +0.079(2.00) Opening	DOT130
Size 2	3.000(76.20) +0.079(2.00) Opening	DOT230




Size 1



Size 2

Size 40	Punch Holder with Shim	MATE00371
Size 40	Shim	MATE00364
Size 76	Punch Holder with Shim	MATE00372
Size 76	Shim	MATE00365
	Draw Bolt	SHC12191
	Snap Ring	SRI00001

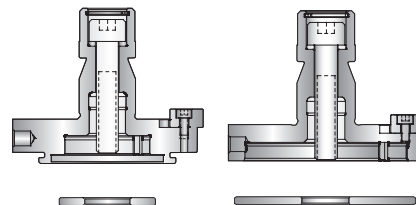

SECTION 3

See Page 57 for extended length and shear options

DISCOUNTS ON ALL MATE TRUMPF STYLE TOOLING
 10% discount on orders between \$500 and \$1499
 15% discount on orders \$1500 and over



MATE QUICKLOCK™ TOOLING SYSTEM

Introducing Mate QuickLock™ Tooling System



Mate QuickLock™ is a new tooling system for Trumpf style presses that combines the economy of conventional Trumpf style tooling with the convenience of alignment via a keyed alignment ring. The hardened and ground key (located in the shank or shoulder, depending on punch point size) engages the keyway in the alignment ring for fast and accurate alignment without a dedicated alignment fixture.

Mate QuickLock™ Tooling System Features:


- High-speed steel punches for extended interval between sharpening.
- Punches include an alignment key for use with the Mate QuickLock™ alignment ring.
- Alignment ring with a keyway that engages the key on both Mate QuickLock™ size 1 and size 2 punches for quick and accurate tool alignment of both.
- Urethane strippers, in an extended size range, for quieter operation and improved piece part quality.
- Highly wear-resistant punches and dies for maximum productivity.

Mate QuickLock™ Universal Alignment Ring

- Precision machined keyway to accept the hardened punch key for accurate alignment, relative to the die aperture, without the need for a fixture.
- Precision ground upper and lower surfaces for positive contact with the punch shoulder for reduced tool stress and maximum service life.
- Elimination of the possibility of punch rotation, with a solid contact between the punch key and the alignment ring keyway.
- Shock resistant tool steel to eliminate cracking, for longer service life.
- Compatible with conventional Trumpf style size 2 punches.
- Universal for both Mate QuickLock™ size 1 and size 2 punches.

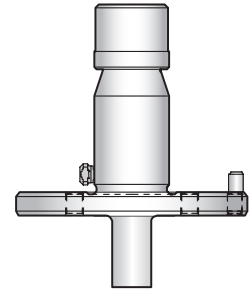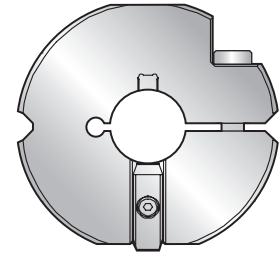

Mate QuickLock™ Push-On Urethane Stripper




Mate QuickLock™ Screw-On Urethane Stripper. Supplied in pairs. Fixed to the punch shoulder with a retainer and flat head screw.



MATE QUICKLOCK™ TOOLING SYSTEM


Mate QuickLock™ Punches

- High speed steel, for extended intervals between sharpening.
- Hardened and ground key for quick and accurate punch alignment.
 - For punches with a diagonal dimension up to 2.000(50.80) the alignment pin is located on the shank.
 - For punches with a diagonal dimension greater than 2.000(50.80) the alignment pin is located on the shoulder.
- 1/4-degree back taper and near polished punch flanks to reduce friction, eliminate galling, and extend punch grind life.
- Maxima™ coating or Nitride treatment available for extreme punching applications.
- Optional extended length punch available, with 3.057(77.60) overall length.

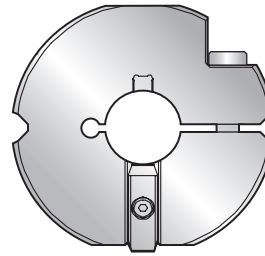


Mate QuickLock™ Urethane Strippers

- Positive, on-the-die stripping to eliminate sheet rattle and reduce punching noise.
- Two types available (dependent on punch point size).
 - Push-On Urethane Stripper
 - Locks securely onto punch and alignment ring for reliable operation.
 - Available for all extended length punches with a diagonal dimension up to 2.000(50.80).
 - Screw-On Urethane Stripper
 - Available in two sizes: for shaped punches with width up to 0.394(10.00) and length up to 2.362(60.00), or length up to 3.000(76.20).
 - Supplied in pairs, and fixed to the punch shoulder with a flat head screw.
 - Punch must have rooftop shear, and length over 2.000(5.08)

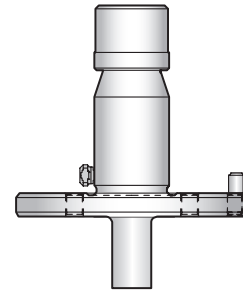

Mate QuickLock™ Push-On Urethane Stripper



Mate QuickLock™ Screw-On Urethane Stripper. Supplied in pairs. Fixed to the punch shoulder with a retainer and flat head screw.

Mate Dies

- Highly wear-resistant tool steel with optimized heat treatment for perfect balance of wear and toughness for maximum interval between regrinds. Up to 0.059(1.50) grind life.
- Double-cut die opening for improved accuracy.
- Uniform clearance radii in die corners for improved component edge quality.
- Improved die strength with domed relief to evenly distribute punching forces.
- Superior roundness and flatness for improved piece part quality.




SECTION 4




MATE QUICKLOCK™ TOOLING SYSTEM

ROUND SIZE 1 AND SIZE 2



Mate QuickLock™ Universal Alignment Ring
The integral keyway allows for fast and accurate alignment of the Mate QuickLock™ punch for faster machine set-up without a dedicated alignment fixture. Also compatible with conventional size 2 punches.



Mate QuickLock™ Punch with Alignment Pin.
The hardened and ground key (located in the shank or shoulder, depending on punch point size) engages the keyway in the alignment ring for fast and accurate alignment without a dedicated alignment fixture.

QUICKLOCK™ UNIVERSAL ALIGNMENT RING

Size 1 and 2 Universal Alignment Ring MATE00480

ROUND QUICKLOCK™ PUNCHES

Size	Range	Part Number	Without Shear	Whisper Shear	Maxima™ Coating – Add
Size 1	0.030 (0.76) to 1.181 (30.00)	PDTD0A			
Size 2	1.182 (30.02) to 1.575 (40.01)	PDTE0A			
Size 2	1.576 (40.03) to 2.000 (50.80)	PDTF0A			
Size 2	2.001 (50.83) to 2.362 (60.00)	PDTG0A			
Size 2	2.363 (60.00) to 3.0063 (76.36)	PDTH0A			

ROUND MACHINE STRIPPERS

Size	Keyed	Rotational
Size 1	SKT10A	SRT10A
Size 2	SKT20A	SRT20A

QUICKLOCK™ PUSH-ON URETHANE STRIPPERS*

Inside Diameter	Part Number
0.590 (15.00)	MATE00532
0.787 (20.00)	MATE00533
1.181 (30.00)	MATE00534
1.378 (35.00)	MATE00548
1.574 (40.00)	MATE00535
2.047 (52.00)	MATE00536

Type (Group)



Keyed (E & F)



Rotational (H & I)

ROUND DIES

Size	Range	Part Number
Size 1	1.181(30.00) +0.079(2.00) Opening	DOT100
Size 2	3.000(76.20) +0.079(2.00) Opening	DOT200



Size 1



Size 2

*Standard length QuickLock™ punches use standard push-on urethane strippers. Extended length QuickLock punches use QuickLock™ urethane strippers.

See Page 57 for critical tool dimensions


DISCOUNTS ON ALL MATE TRUMPF STYLE TOOLING
10% discount on orders between \$500 and \$1499
15% discount on orders \$1500 and over




Dimensions in inches (millimeters)

MATE QUICKLOCK™ TOOLING SYSTEM

RECTANGLE SIZE 1 AND 2



Mate QuickLock™ Universal Alignment Ring
The integral keyway allows for fast and accurate alignment of the Mate QuickLock™ punch for faster machine set-up without a dedicated alignment fixture. Also compatible with conventional size 2 punches.



Mate QuickLock™ Punch with Alignment Pin.
The hardened and ground key (located in the shank or shoulder, depending on punch point size) engages the keyway in the alignment ring for fast and accurate alignment without a dedicated alignment fixture.

QUICKLOCK™ UNIVERSAL ALIGNMENT RING

Size 1 and 2 Universal Alignment Ring MATE00480


RECTANGLE PUNCHES

Size	Range	Part Number	Without Shear	Whisper Shear	Maxima™ Coating – Add
Size 1	0.030 (0.76) to 1.181 (30.00)	PDTD1A			
Size 2	1.182 (30.02) to 1.575 (40.01)	PDTE1A			
Size 2	1.576 (40.03) to 2.000 (50.80)	PDTF1A			
Size 2	2.001 (50.83) to 2.362 (60.00)	PDTG1A			
Size 2	2.363 (60.00) to 3.0063 (76.36)	PDTH1A			

RECTANGLE MACHINE STRIPPERS

Size	Keyed	Rotational
Size 1	SKT1_A	SRT1_A
Size 2	SKT2_A	SRT2_A

Type (Group)



Keyed (E & F)
Rotational (H & I)

QUICKLOCK™ PUSH-ON URETHANE STRIPPERS*

Inside Diameter	Part Number
0.590 (15.00)	MATE00532
0.787 (20.00)	MATE00533
1.181 (30.00)	MATE00534
1.378 (35.00)	MATE00548
1.574 (40.00)	MATE00535
2.047 (52.00)	MATE00536




Size 1



Size 2

RECTANGLE DIES

Size	Range	Part Number
Size 1	1.181(30.00) +0.079(2.00) Opening	DOT1_0
Size 2	3.000(76.20) +0.079(2.00) Opening	DOT2_0

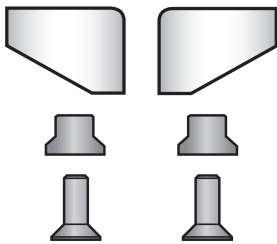

MATE QUICKLOCK™ Screw-On Urethane Stripper


For use with shaped Mate QuickLock™ Punches with optional rooftop shear and width up to 0.394(10.00). Two sizes available.

G-Station with punch length 2.001(5.08) – 2.362 (60.00)	MATE00538
H-Station with punch length up to 3.000 (76.20)	MATE00539
Retainer – pair	MATE00578
Screw – pair	MATE00579


*Standard length QuickLock™ punches use standard push-on urethane strippers. Extended length QuickLock punches use QuickLock™ urethane strippers.



MATE QUICKLOCK™ TOOLING SYSTEM STANDARD SHAPE SIZE 1 AND SIZE 2



Mate QuickLock™ Universal Alignment Ring
The integral keyway allows for fast and accurate alignment of the Mate QuickLock™ punch for faster machine set-up without a dedicated alignment fixture. Also compatible with conventional size 2 punches.



Mate QuickLock™ Punch with Alignment Pin.
The hardened and ground key (located in the shank or shoulder, depending on punch point size) engages the keyway in the alignment ring for fast and accurate alignment without a dedicated alignment fixture.

QUICKLOCK™ UNIVERSAL ALIGNMENT RING

Size 1 and 2 Universal Alignment Ring MATE00480

SHAPED PUNCHES

Size	Range	Part Number	Without Shear	Whisper Shear	Maxima™ Coating – Add
Size 1	0.030 (0.76) to 1.181 (30.00)	PDTD_A			
Size 2	1.182 (30.02) to 1.575 (40.01)	PDTE_A			
Size 2	1.576 (40.03) to 2.000 (50.80)	PDTF_A			
Size 2	2.001 (50.83) to 2.362 (60.00)	PDTG_A			
Size 2	2.363 (60.00) to 3.0063 (76.36)	PDTH_A			

SHAPED MACHINE STRIPPERS

Size	Keyed	Rotational
Size 1	SKT1_A	SRT1_A
Size 2	SKT2_A	SRT2_A

QUICKLOCK™ PUSH-ON URETHANE STRIPPERS*

Inside Diameter	Part Number
0.590 (15.00)	MATE00532
0.787 (20.00)	MATE00533
1.181 (30.00)	MATE00534
1.378 (35.00)	MATE00548
1.574 (40.00)	MATE00535
2.047 (52.00)	MATE00536

Type (Group)



Keyed (E & F)



Rotational (H & I)



SHAPED DIES

Size	Range	Part Number
Size 1	1.181(30.00) +0.079(2.00) Opening	D0T1_0
Size 2	3.000(76.20) +0.079(2.00) Opening	D0T2_0




Size 1



Size 2

*STANDARD SHAPES

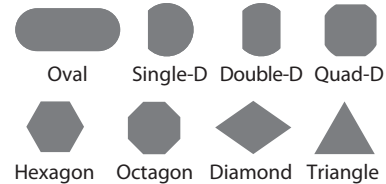


*Standard length QuickLock™ punches use standard push-on urethane strippers. Extended length QuickLock punches use QuickLock™ urethane strippers.




MATE QUICKLOCK™ TOOLING SYSTEM

SQUARE SIZE 1 AND SIZE 2



Mate QuickLock™ Universal Alignment Ring
The integral keyway allows for fast and accurate alignment of the Mate QuickLock™ punch for faster machine set-up without a dedicated alignment fixture. Also compatible with conventional size 2 punches.



Mate QuickLock™ Punch with Alignment Pin.
The hardened and ground key (located in the shank or shoulder, depending on punch point size) engages the keyway in the alignment ring for fast and accurate alignment without a dedicated alignment fixture.

QUICKLOCK™ UNIVERSAL ALIGNMENT RING

Size 1 and 2 Universal Alignment Ring MATE00480

SQUARE QUICKLOCK™ PUNCHES

Size	Range	Part Number	Without Shear	Whisper Shear	Maxima™ Coating – Add
Size 1	0.030 (0.76) to 1.181 (30.00)	PDTD3A			
Size 2	1.182 (30.02) to 1.575 (40.01)	PDTE3A			
Size 2	1.576 (40.03) to 2.000 (50.80)	PDTF3A			
Size 2	2.001 (50.83) to 2.362 (60.00)	PDTG3A			
Size 2	2.363 (60.00) to 3.0063 (76.36)	PDTH3A			

SQUARE MACHINE STRIPPERS

Size	Keyed	Rotational
Size 1	SKT13A	SRT13A
Size 2	SKT23A	SRT23A

QUICKLOCK™ PUSH-ON URETHANE STRIPPERS*

Inside Diameter	Part Number
0.590 (15.00)	MATE00532
0.787 (20.00)	MATE00533
1.181 (30.00)	MATE00534
1.378 (35.00)	MATE00548
1.574 (40.00)	MATE00535
2.047 (52.00)	MATE00536

Type (Group)



Keyed (E & F)



Rotational (H & I)

SQUARE DIES

Size	Range	Part Number
Size 1	1.181(30.00) +0.079(2.00) Opening	DOT130
Size 2	3.000(76.20) +0.079(2.00) Opening	DOT230



Size 1



Size 2

*Standard length QuickLock™ punches use standard push-on urethane strippers.
Extended length QuickLock punches use QuickLock™ urethane strippers.

SECTION 4

See Page 57 for critical tool dimensions

DISCOUNTS ON ALL MATE TRUMPF STYLE TOOLING
10% discount on orders between \$500 and \$1499
15% discount on orders \$1500 and over

Dimensions in inches (millimeters)




EUROSTYLE™ TOOLING SYSTEM

0.200 x 2.000


PUNCH ASSEMBLY

RECTANGLE	XPT2170200X2000
RECTANGLE, WITH MAXIMA® COATING	XPT21M0200X2000
OVAL	XPT2270200X2000
OVAL, WITH MAXIMA® COATING	XPT22M0200X2000

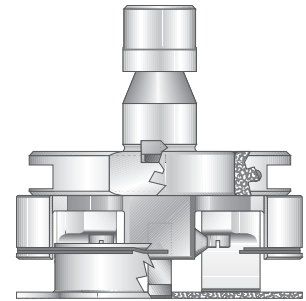

URETHANE SPRINGS

UTS1

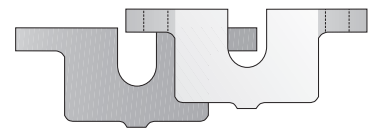

REPLACEMENT PUNCH INSERT

RECTANGLE	PATS1A0200X2000
RECTANGLE, WITH MAXIMA® COATING	PATS1M0200X2000
OVAL	PATS2A0200X2000
OVAL, WITH MAXIMA® COATING	PATS2M0200X2000



REPLACEMENT STRIPPER

MATE00461

**NOT FOR TC500
AND NEWER MACHINES**



EUROSTYLE™ TOOLING SYSTEM


Precision and rigidity of the guided shearing assembly extend punch and die life *up to three times more* than non-guided assemblies...

A guided, spring-loaded stripper with on-the-die performance is built into the punching assembly. The stripper is guided by the inside surface of the retainer and by the sides of the punch insert. The punch point is guided by the stripper as it enters the material. This protects slitting punches against deflection at the point of impact so they last much longer. Spring pressure yields positive stripping action and clamps material against the die for clean, accurate punching, and flatter piece parts.

Three Alignment Flats...

- Three alignment flats on the punch holder allow immediate 0° or 90° alignment without disassembly.
- The guided stripper allows for on-die stripping which is essential for material control with minimal slippage. The greater accuracy eliminates secondary finishing, while the punching operation can be accomplished in fewer hits.

External alignment flats allow for simple 0 and 90 degree alignment ring setting without disassembly

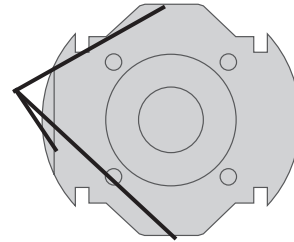


Slitting Options...




Standard with radius corners for smooth blending of successive cuts in slitting operations.

The oval punch is used for a smooth transition between punch hits. No "pips" or edge irregularities.



Shake-and-break (See D06 on Page 36) with square corners for precise gaps needed for holding corner tabs.

The rectangular punch is used for precision corner cutting.




Smooth Slitting Tip...

To reduce edge irregularities left by square ended tools, it is common practice to order oval punches and rectangular dies with 0.060 (1.50) radius corners as sets.


Slitting with a rectangular punch and die can result in small "pips" which are visually undesirable. This is the result of natural forces that take place when performing this operation.

The sharp corners of a rectangular punch and die force an abrupt change in the direction that the material flows prior to the fracture of the slug from the sheet. This abrupt change in the direction of flow can be decreased by placing a radius on the corners of the rectangle. As the radius increases in size, a more uniform flow of material is achieved.

When the size of the radius is increased to 1/2 the width of the rectangle, the shape becomes an oval. This oval shaped punch and die will result in an improved edge appearance when slitting.

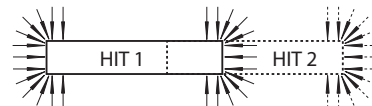

Abrupt change in material flow occurs at the sharp corners of the rectangle

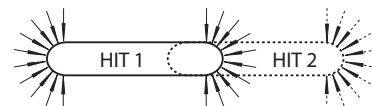

Material flows uniformly at the ends of the oval

SECTION 5

Punch insert can be removed from tool without disassembly to facilitate sharpening and punch replacement.



Dimensions in inches (millimeters)



LOGLIFE™ SLITTING TOOL SYSTEM



Mate's LongLife™ slitting tool system for Trumpf style punch presses is designed to deliver exceptional value combining premium tool steel punch and die inserts with robust punch and die holders. Fully OEM compatible, Mate LongLife provides you with the most cost-effective slitting tool solution.

PUNCH INSERT

- LongLife™ Premium M4PM™ high speed steel provides maximum interval between regrinds and improves piece part quality
- Available in four standard shapes: rectangle, oval, dovetail and trapezoid
- Metric and inch sizes: Size 56 0.787(19,98) to 2.205(56,00)
Size 76 2.206(56,01) to 3.000(76,20)
- Widths up to 0.250(6,35)
- Optional Maxima™ coating available
- Compatible with Trumpf style

PUNCH HOLDER


- LongLife™ tool system offers two styles of punch holders:
 - Integral alignment ring for fast, precise tool set up
 - Separate heavy duty alignment ring (additional) to allow manual angle setting flexibility
- Works with conventional machine strippers

DIE INSERT

- Premium M4PM™ high speed steel for high wear resistance and exceptional die strength
- Metric and inch sizes:
 - Size 56 0.787(19,98) to 2.205(56,00)
1-piece or 2-piece insert
 - Size 76 0.787(19,98) to 3.000(76,20)
1-piece or 2-piece insert
- Widths up to 0.250(6,35)
- 11 standard discrete die clearances 0.004(0,10) to 0.024(0,60) in 0.002(0,05) increments
- Compatible with Trumpf style

DIE HOLDER ASSEMBLY

- Includes full shim set with two thicknesses
- Two sizes:
 - Size 56 for up to .250 x 2.000(6,35 x 56,00)
 - Size 76 for up to .250 x 3.000(6,35 x 76,20)




DESCRIPTION	PART NUMBER
SLITTING PUNCH HOLDER	PPD2HA


5.00 X 56.00 mm




DESCRIPTION	PART NUMBER
PUNCH INSERT	PPDE_A



DESCRIPTION	PART NUMBER
ONE-PIECE INSERT	DSDE_A
TWO-PIECE INSERT	DTDE_A



DESCRIPTION	PART NUMBER
DIE BASE ASSEMBLY	DPD2H056

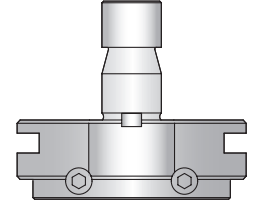


DESCRIPTION	PART NUMBER
SLITTING PUNCH HOLDER WITH INTEGRATED ALIGNMENT RING	PPD2HAVANTF


5.00 X 76.20 mm



DESCRIPTION	PART NUMBER
PUNCH INSERT	PPDF_A



DESCRIPTION	PART NUMBER
ONE-PIECE INSERT	DSDF_A
TWO-PIECE INSERT	DTDF_A

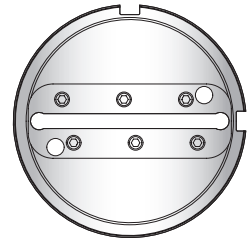

DESCRIPTION	PART NUMBER
DIE BASE ASSEMBLY	DPD2H076

Die Shims

- 5,00 x 56,00 (0.30mm thickness) MATE1326
- 5,00 x 56,00 (0.51mm thickness) MATE1327
- 5,00 x 76,20 (0.30mm thickness) MATE1328
- 5,00 x 76,20 (0.51mm thickness) MATE1329

Available Shapes:



*Solid size 2 die, Rectangle or Oval only

DOT2_0



MATE M4PM™ TOOL STEEL

M4PM™ is a high speed, particle metallurgy tool steel designed for use in high performance tooling systems.

The chemical composition of M4, the particle metallurgy manufacturing process, and a triple temper heat treatment process produce M4PM: the world's finest tool steel for use in punching tools.

M4PM is a very homogeneous, high quality tool steel which has many advantages when compared to alternative tool steels commonly available. These advantages include:


Superior Wear Resistance – 100% better wearing, M4PM offers superior resistance to adhesive- and abrasive-wear to maximize the interval between regrinds.

- More uniform distribution of smaller carbides—results in improved ductility (adhesive-wear) while still providing abrasive-wear resistant carbides over the entire surface of the material.
- 100% more Vanadium carbides—harder wearing for greater resistance to abrasive-wear.
- Increased Tungsten carbides—harder wearing and offer better red hardness; increased resistance to high temperatures which may anneal or damage the material.
- Higher hardenability—increased alloy content results in higher effective hardness for better wear resistance.

Increased Toughness – the molecular structure of M4PM is 50% tougher than conventional tool steels in impact strength tests.

- Triple temper heat treatment process—ensures full conversion of the material matrix. Results in fully tempered martensite and reduced internal stress, together with better dimensional stability.
- More uniform distribution of smaller carbides—offsets the effects of increased alloy content. Results in a more “interlocked” material matrix for significantly reduced tool breakage and edge chipping. See micrograph.


Better Value – customer trials have shown that tools manufactured in M4PM last 100% longer between regrinds than tools manufactured using conventional High Speed Steel. By increasing the interval between regrinds, the tooling lasts longer and punches many more holes before needing to be replaced.

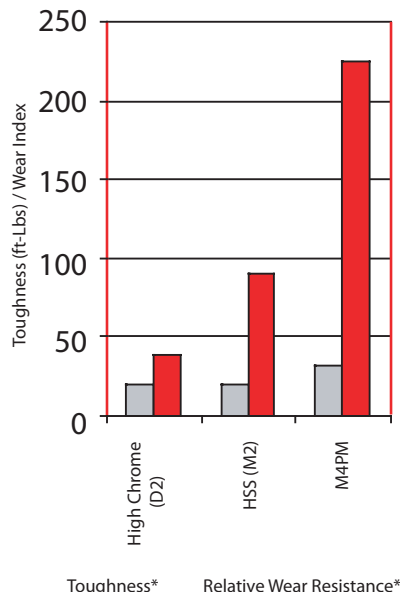

International Material Standards			
	D2	M2	M4PM
JIS	SKD 11	SKH 51	SKH 54
Wnr	1.2379	1.3343	none
DIN	X155 CrVMo 12-1	HS 6-5-2	none

M4PM Chemical Composition	
Carbon	1.42%
Chromium	4.00%
Vanadium	4.00%
Tungsten	5.50%
Molybdenum	5.25%

Micrograph shows that the particle metallurgy process produces a very homogeneous, high quality tool steel with superior wear resistance, toughness and dimensional stability.

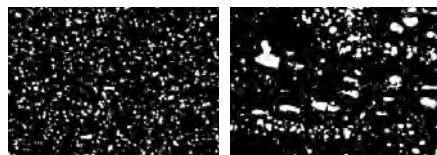

M4PM conventional tool steel





















SECTION 5

*Toughness: Charpy C-Notch impact strength test.





















**Relative Wear Resistance: 10x Cross cylinder adhesive wear test. Based upon steel manufacturers data.



SPECIAL SHAPES



SPECIAL SHAPES



ADD-ONS

General

Radius Corner	Add	10%	to punch and die
Non-Standard Straight Before Radius (SBR) Dimension	Add	25%	to punch
Extra Back Taper (1 degree per side)	Add	25%	to punch
Special Angle Settings	Add	25%	to die
Optional Shear (Limited Options)			no charge
Shock Steel - for rectangles and squares when total clearance is greater than 0.024(0.60)	Add	25%	to die
Optional 77,00mm (long) or 77,50mm (extended) lengths			no charge
Flat shear only; Size 1, Size 2, Size 40 and Size 76			
Small Diameter Round Tools			
Diameter 0.031 (0.79) to 0.061 (1.55)	Add	25%	to punch and die
Diameter 0.062 (1.56) to 0.092 (2.34)	Add	10%	to punch and die
Narrow Width Shaped Tools			
Widths under 0.125 (3.18)	Add	25%	to punch, stripper, and die
Maxima™ Coating or Nitride Treatment			
Trumpf Style Tooling			
Size 0-A and Size 0-B			
Size 1 and Size 1-X			
Size 2			
Size 3			
Slitting Insert			
Multi Tool: 4, 5, 6, and 10 station			
Mate QuickLock™			
Size 1			
Size 2			
Mate NEXT™			
Size 40			
Size 76			
Non-Standard Design Features:			Call for Quote



EASYVIEW O-RINGS


Introducing Lean Visual Management Capability for size 1 and size 2 Trumpf style dies. Mate's patent pending EasyView™ technology uses a colored O-ring for clear and instant identification.

- **Fully compatible with existing Trumpf die inventories**
- **No die key interference**
- **O-rings manufactured from oil resistant butyl rubber for years of service life**
- **Available in five distinct colors for optimum differentiation**

Use the simple removable O-ring to identify a specific feature of the die making it faster and easier for the user to make the correct decision every time. Eliminate wasted time looking for the correct tool.

Order Trumpf EasyView™ today!

Examples of Use	Criteria	Color
Material Type	Mild Steel	Black
	Aluminum	Red
	Stainless Steel	Yellow
Material Thickness	0.040(1.00)	Green
	0.059(1.50)	Yellow
	0.078(2.00)	White
Die Clearance	0.008(0.20)	Red
	0.012(0.30)	Yellow
	0.016(0.40)	Green
Machine Location	Machine #1	Red
	Machine #2	White
	Machine #3	Black
Shift	Days	White
	Nights	Black
Status	OK to use	Green
	To be Sharpened	Red

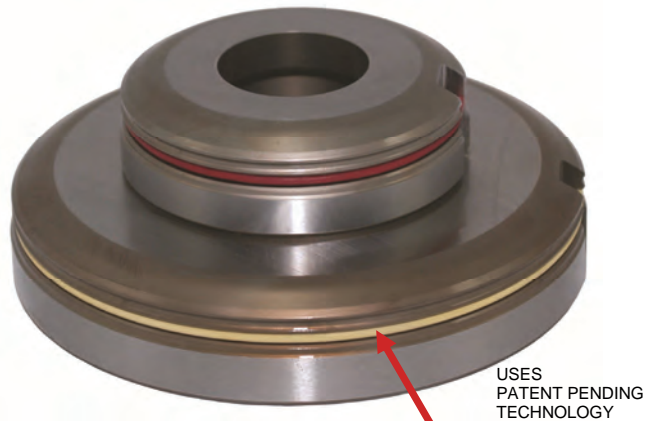

Change the O-rings at any time to customize each die to your specific application.

Ordering Information

		BLACK	RED	GREEN	YELLOW	WHITE
TRUMPF SIZE 1 O-RING	PACK OF 5	MATE01349	MATE01350	MATE01351	MATE01352	MATE01353
TRUMPF SIZE 2 O-RING	PACK OF 5	MATE01354	MATE01355	MATE01356	MATE01357	MATE01358

Not available for Minimatic dies.



TRUMPF STYLE SPECIAL APPLICATIONS

CENTERPOINT UP

CENTERPOINT DOWN



COMPLETE ASSEMBLY
XTT1D0P199

COMPLETE ASSEMBLY
XTT1D0P299

COUNTERSINK - DEDICATED

COUNTERSINK - UNIVERSAL




UPPER ASSEMBLY
(Includes adjustable holder)
UPPER INSERT
XTT2D0B316
ADJUSTABLE HOLDER
MALPH
STANDARD DIE
COMPLETE ASSEMBLY
XTT1D0B399




UPPER ASSEMBLY
(Includes adjustable holder)
UPPER INSERT
XTT2D0B216
ADJUSTABLE HOLDER
MALPH
STANDARD DIE
COMPLETE ASSEMBLY
XTT1D0B299

CARD GUIDE

ROUND EMBOSS - FORMED




COMPLETE ASSEMBLY
XTT2D0A000 \$ 1,680.00



COMPLETE ASSEMBLY
XTT2D0E100

SHAPED EMBOSS - FORMED

EMBOSS - CONTINUOUS

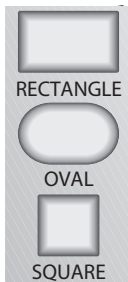

COMPLETE ASSEMBLY
XTT2D0E300



COMPLETE ASSEMBLY
XTT2D0BT00

DISCOUNTS ON ALL MATE TRUMPF STYLE TOOLING
10% discount on orders between \$500 and \$1499
15% discount on orders \$1500 and over



TRUMPF STYLE SPECIAL APPLICATIONS

EXTRUSION - TAPPING




COMPLETE ASSEMBLY
XTT2D0D100

EXTRUSION - PIERCE AND EXTRUDE



COMPLETE ASSEMBLY
XTT2D0DP00


KNOCKOUT - SINGLE



COMPLETE ASSEMBLY :
ROUNDS
XTT2D0K100

STANDARD SHAPES
XTTD0K300


KNOCKOUT - DOUBLE



COMPLETE ASSEMBLY :
ROUNDS
XTT2D0K400


STANDARD SHAPES
XTT2D0K300

LANCE AND FORM - LOCATING TAB



COMPLETE ASSEMBLY
XTT2D0FD00

LOUVER - OPEN END



COMPLETE ASSEMBLY
XTT2D0L000


SECTION 6

DISCOUNTS ON ALL MATE TRUMPF STYLE TOOLING
10% discount on orders between \$500 and \$1499
15% discount on orders \$1500 and over




TRUMPF STYLE SPECIAL APPLICATIONS

LOUVER - CLOSED END




COMPLETE ASSEMBLY
XTT2D0LC00

LOUVER - CONTINUOUS




COMPLETE ASSEMBLY
XTT2D0LL00

SHEARBUTTON




COMPLETE ASSEMBLY
XTT2D0S100

THREADFORM



COMPLETE ASSEMBLY
XTT2D0T100

SCISSORTOOL™



COMPLETE ASSEMBLY
XTT2D0ST00

SHEETMARKER™



For Trumpf TC2000 and newer COMPLETE ASSEMBLY
XTT2D0SM00

ROLLERBALL®



For Trumpf TC2000 and newer COMPLETE ASSEMBLY
XTT2D0RB00

ADDITIONAL ASSEMBLIES AVAILABLE



CLUSTERS :



LANCE AND FORM
(MANY VARIETIES)



FULLY GUIDED



SEMI-GUIDED

NON-GUIDED



EMBOSS -
COLD FORGED



STAMPING -
ALPHA-NUMERIC



EMBOSS -
EDGE FORM



STAMPING -
V-LINE CUSTOM
INSCRIPTION

CALL FOR QUOTE

DISCOUNTS ON ALL MATE TRUMPF STYLE TOOLING
10% discount on orders between \$500 and \$1499
15% discount on orders \$1500 and over



TRUMPF STYLE SPECIAL APPLICATIONS AVAILABLE FROM STOCK!

Mate now has a huge inventory of Special Applications in stock for immediate delivery! Mate special applications from stock enable you to produce your parts sooner, more efficiently, and more profitably. Order yours today!

Tapping Extrusion

Station	Inside Diameter	Material Thickness	Stock Part Number
Size 2	M4 - 0.131(3.32) +/-0.001(0.02)	0.056(1.42) to 0.062(1.57)	XTT2D0D100-0005
Size 2	M4 - 0.131(3.32) +/-0.001(0.02)	0.035(0.89) to 0.039(0.99)	XTT2D0D100-0006
Size 2	M5 - 0.166(4.22) +/-0.001(0.02)	0.056(1.42) to 0.062(1.57)	XTT2D0D100-0003
Size 2	M5 - 0.166(4.22) +/-0.001(0.02)	0.035(0.89) to 0.039(0.99)	XTT2D0D100-0004
Size 2	M6 - 0.197(5.00) +/-0.001(0.02)	0.056(1.42) to 0.062(1.57)	XTT2D0D100-0001
Size 2	M6 - 0.197(5.00) +/-0.001(0.02)	0.035(0.89) to 0.039(0.99)	XTT2D0D100-0002

Shearbutton

Station	Inside Diameter	Material Thickness	Stock Part Number
Size 2	0.197(5.00)	0.188(4.77) Max	XTT2D0S100-0001
Size 2	0.200(5.08)	0.188(4.77) Max	XTT2D0S100-0002

Centerpoint

Station	Inside Diameter	Material Thickness	Stock Part Number
Size 1	Down	0.250(6.35) Max	XTT1D0P200-0001

Universal Countersink

Station	Inside Diameter	Material Thickness	Stock Part Number
Size 1	82 deg	0.250(6.35) Max	XTT1D0B201-0001
Size 1	90 deg	0.250(6.35) Max	XTT1D0B201-0002
Size 1	120 deg	0.250(6.35) Max	XTT1D0B201-0003


Custom Applications

Station	Inside Diameter	Material Thickness	Stock Part Number
Size 2	Mate Rollerball*		XTT2D0RB00
Size 2	Mate Sheetmarker*		XTT2D0SM00
Size 2	Mate Rollerball* Deburr		XTT2D0RD00


*Stock Ground Symbol Stamp is not compatible with newer Trumpf machines.
Contact Mate Customer Service for more information.




SPECIAL APPLICATIONS



Cluster – Round



Cluster – Shape



Card Guide



Centerpoint




Countersink – Round



Countersink – Shape



Emboss – Beading

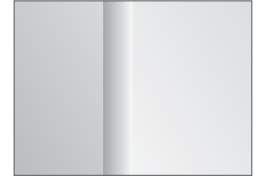

Emboss – Edgeform



**Emboss – Formed
(Round and Shaped)**



Emboss – Cold Forged




Extrusion – Tapping




Extrusion – Flanged Hole



Hinge Tool




Knockout




Lance And Form



Louwer



Scissortool™




**Shearbutton
(Round and Shaped)**




Rollerball™




Sheetmarker™



Stamping – Alpha Numeric



Stamping – V-line



Threadform



See MATE Forming Tool
Order Guide for forming tool
ordering specifications...

Ask for part number
LIT00002

Cluster



Produce multiple holes with minimal hits.

Typical Application:

- Material thickness from 0.020(0.50) to 0.157(4.00).
- Other restraints dependent upon station size, punch size and shape and press tonnage.

Comments:

- For greater hole uniformity and flatter sheets, spread the punches to avoid punching adjacent holes in the same hit.
- Do not re-punch through previously punched holes to complete a pattern. A single hit tool may be necessary.



Card Guide


A retainer for printed circuit boards.

Typical Application:

- Material thickness from 0.040(1.00) to 0.078(2.00).
- Maximum recommended top-of-sheet to top-of-form height is 0.125(3.20).

Comments:

- Length of the card guide is dependent upon station size and machine tonnage.
- Also available as a continuous form to increase productivity and flexibility.

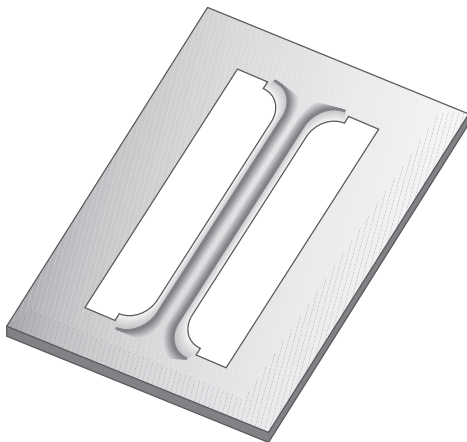

HIGH PERFORMANCE TOOLING

Countersink—Dedicated

Allows screw and rivet head to sit flush or below the surface of the material.

Typical Application:

- Material thickness from 0.048(1.22) to 0.250(6.35), dependent upon press tonnage capacity.

Comments:

- The shoulder (dedicated) style is generally ordered for one material thickness and screw size.
- The shoulder style coins the surrounding area, producing a clean flat countersink with minimal burring.



Emboss—Beading


A stiffener to add rigidity to sheet metal panels.

Typical Application:

- Material thickness from 0.027(0.70) to 0.250(6.35), dependent upon press tonnage capacity.

Comments:

- The increment between hits is determined by the cosmetic requirements for the finished part. Smaller increments result in improved appearance.
- The form height should be as low as possible to minimize sheet distortion.

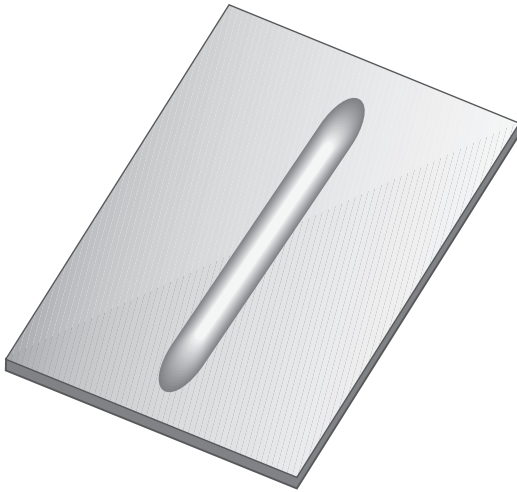

Emboss—Cold Forged


Produce a logo or design on a part.

Typical Application:

- Material thickness from 0.018(0.46) to 0.118(3.00).
- Best results in material thickness from 0.040(1.00) to 0.078(2.00).
- Maximum size dependent on the tooling style, station size, and press tonnage capacity.

Comments:

- An exact drawing, CAD file, or artwork of logo is required to produce this type of assembly.

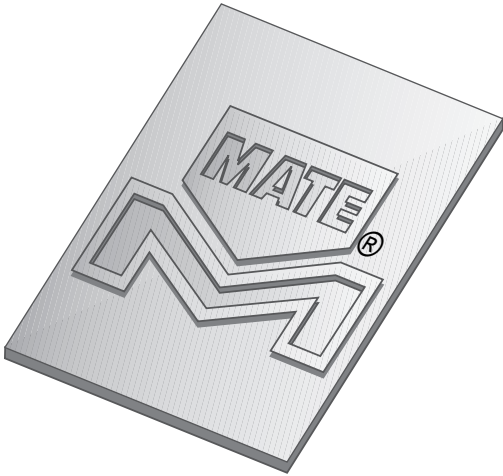

Emboss—Formed


Provide a recess or a protrusion.

Typical Application:

- Material thickness from 0.027(0.70) to 0.250(6.35), dependent upon press tonnage capacity.

Comments:

- Best results are attained when the side wall angle is 45° or less.
- Optimum form height is 3 x the material thickness or less.

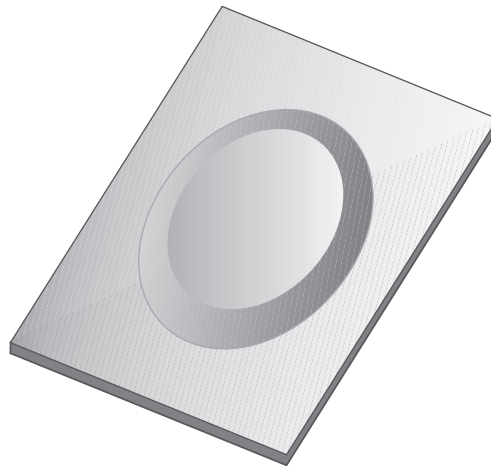

HIGH PERFORMANCE TOOLING

Extrusion—Tapping


Threading for screws and increased bearing area for tubes, etc.

Typical Application:

- Material thickness from 0.031(0.80) to 0.106(2.70).
- Overall Height – 2x to 2.5x material thickness.
- Diameter – 0.374(9.50) (M10 Screw thread).

Comments:

- Additional inverted dies are required to accommodate alternate material thickness.

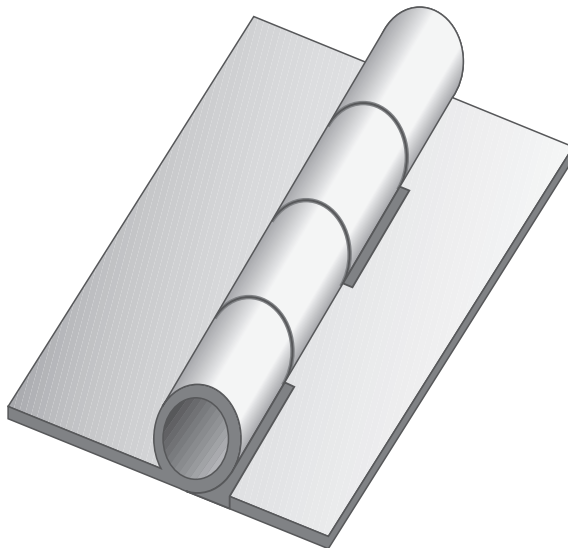

Hinge

Creates hinge knuckles as integral elements on sheet metal components.

Typical Application:

- The range of this application is dependent on a combination of the material thickness, pin diameter and feed gap of the press.

Comments:

- An integral hinge knuckle on a component will eliminate the costly process of purchasing and assembling separate hinges.



Knockout


Allows optional pathway for electrical cable.

Typical Application:

- Material thickness from 0.024(0.60) to 0.118(3.00).
- Maximum size dependent upon material type, thickness, and press tonnage capacity.

Comments:

- The tool can normally be used with other material thickness within a range of + or - 0.016(0.41) from design thickness.
- Maintain 0.236(6.00) difference between diameters used for knockout.

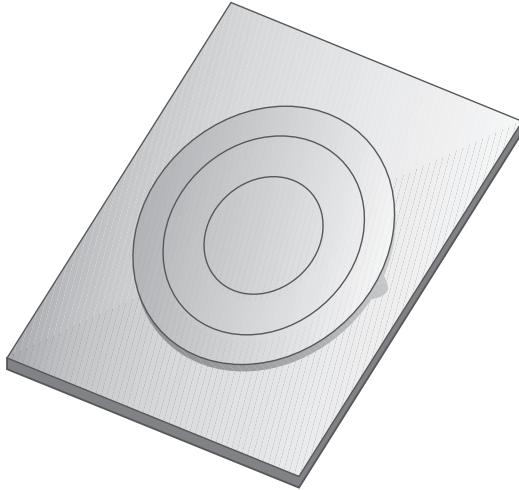

Lance And Form


For air flow, decoration, as card guides, location markers, shear tabs, wire harnesses, or clip attachments.

Typical Application:

- Material thickness from 0.020(0.50) to 0.118 (3.00).
- Maximum recommended top-of-sheet to top-of-form height is 0.250(6.40).
- Other limitations include material type, station size, and press tonnage capacity.

Comments:

- The inclusion of a 5° draft angle is recommended to assure reliable operation of open ground forms.

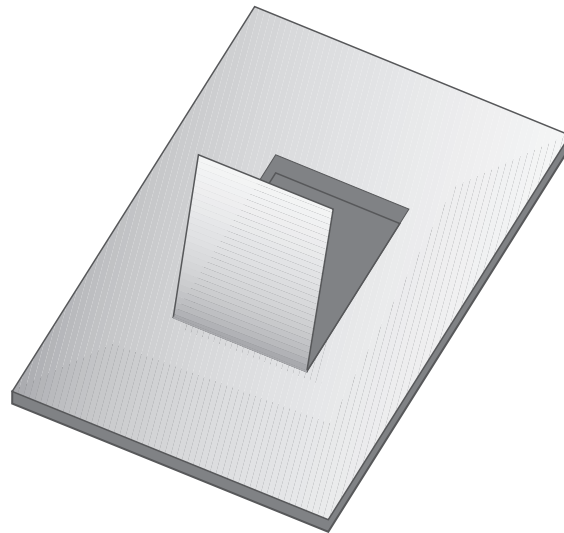

See MATE Forming Order Tool Guide for forming tool ordering specifications...

Ask for part number
LIT00002

Dimensions in inches (millimeters)



HIGH PERFORMANCE TOOLING

Louver


Provides air flow or ventilation.

Typical Application:

- Material thickness from 0.028(0.70) to 0.106(2.70)
- Maximum recommended top-to-top height is 0.255(6.50)


Comments:

- One tool cuts the sheet and produces the form in the same operation.
- The tool is designed for a specific material thickness.

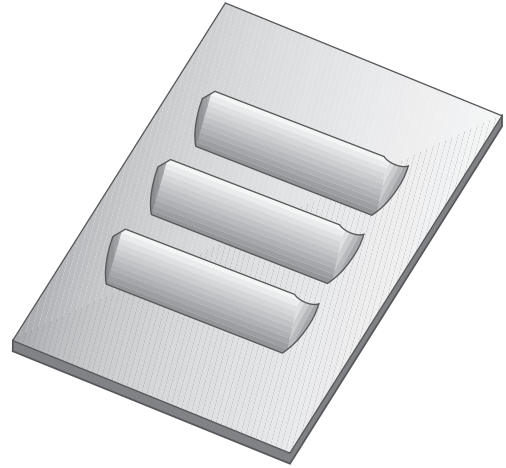

Insert Sizes Available

Fractional	Decimal	Metric
3/32	0.094	2.40
1/8	0.125	3.12
3/16	0.188	4.50
1/4	0.250	6.34

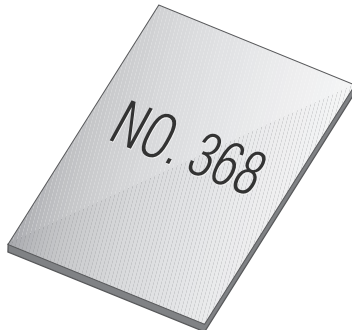

Stamp—Alpha Numeric

Provides indelible marking of alpha-numeric characters on the top or bottom of a sheet.

Typical Application:

- Material thickness 0.032(0.80) up to machine capacity.
- Characters available in 4 popular sizes. See table.

Comments:

- Individual characters can be easily changed.



See MATE Forming Order Tool Guide for forming tool ordering specifications...

Ask for part number
LIT00002

Threadform

Provides a form to accept a sheet metal screw.

Typical Application:

- Material thickness 0.020(0.50) to 0.048(1.20).
- Size is dependent upon screw size selected.
- Thicker material requires a countersink operation or thinning prior to threadforming.



V-Line Stamping

Produce logos, messages, or symbols.

Typical Application:

- Material thickness from 0.032(0.80) up to machine capacity.
- Maximum size is dependent on station size, size of symbols and characters, and press tonnage capacity.

Comments:

- V-Line Stamping -- renders the image with a sharp line stamped into the surface.
- An exact drawing, CAD file, or artwork of logo is required in order to produce this type of assembly.



HIGH PERFORMANCE TOOLING

Mate EasySnap™


Scrapless retention system to allow fabricator to snap punched parts out of sheet metal.

Typical Application:

- Material thickness from 0.020(0.50) up to 0.078(2.00) for mild steel and aluminium, and 0.020(0.50) up to 0.059(1.50) for stainless steel.
- Maximum length of form is 36.00(914.40)

Comments:

- Reduces the need for slitting and micro joints for part retention.
- Material type and thickness must be specified at time of order.

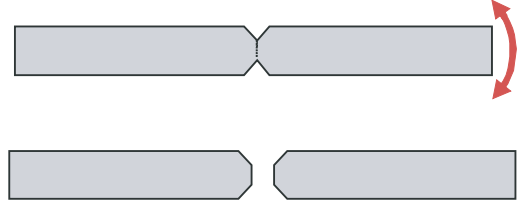

Mate HexLock™

Provides a reliable and secure method of retaining common threaded fasteners in sheet metal.

Typical Application:

- Material thickness from 0.020(0.50) up to 0.118(3.00)
- Other limitations include material type, station size, and press tonnage capacity.

Comments:

- Suitable for hexagon nuts and hexagon headed bolts that conform to DIN933 or DIN934.



Rollerball™

The Rollerball is an exciting new concept designed by Mate Precision Tooling to take advantage of the extended programming capabilities of hydraulic and other punch presses capable of operating in the x and y axis with the ram down. The Rollerball is capable of making forms not possible with single hit forming tools.

Typical Application:


- Maximum workable material thickness is 0.105(2.70) mild steel.

Comments:

- The press must be capable of holding the ram down while the sheet is moved in the x and/or y.

Patent Pending

XTT2D0RB00

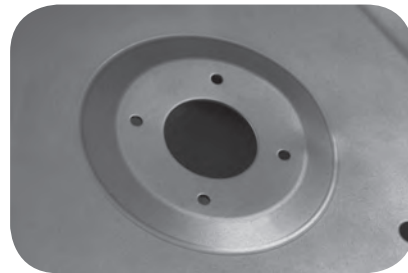

Rollerball Deburr™

Punching processes frequently cause burrs on sheet metal parts. They are unavoidable. Removing them requires secondary deburring operations that are either performed manually or use specialized equipment. Now Mate helps you eliminate these costly secondary operations with the new Rollerball Deburr™ tool!

Typical Application:

- Materials of any thickness in mild steel, stainless steel and alum

Comments:

- The Mate Rollerball Deburr tool takes advantage of Mate's Rollerball™ technology by using the extended programming capabilities of punch presses that can operate in the x and y axis with the ram down.

Rollerball Deburr pushes the burr away and creates a radius on the side of the part. Sold as a set, Rollerball Deburr comes complete with everything you need.

Patent Pending

XTT2D0RD00



Sheetmarker™



For markings or etchings on the surface of sheet metal. The tool uses a diamond pointed insert in a spring loaded holder to create the marking.

Typical Application:

- The Sheetmarker Tool can be used on all material types and thicknesses.

Comments:

- A wide variety of results can be produced, ranging from very light etching to fairly deep grooves in the sheet.
- Variations are achieved with a combination of three spring pressures and two insert point angles.
- The press must be capable of holding the ram down while the sheet is moved in the x and/or y.

Patent Numbers: US 7,168,364 B2.
Europe 1 099 509. Singapore: 88336

XTT2D0SM00



Mate SnapLock™

Use:

For joining materials, thus eliminating secondary operations such as spot welding, riveting, or fastening with threaded hardware.

Typical Application:

- Material thickness from 0.020(0.50) up to 0.118(3.00).
- Other limitations include material type, station size, and press tonnage capacity.


Comments:

- Suitable for joining materials of dissimilar type and/or thickness.
- Positive locking and locating feature for fast and accurate assembly.




MULTI TOOL ANGLE SETTING


5-Station

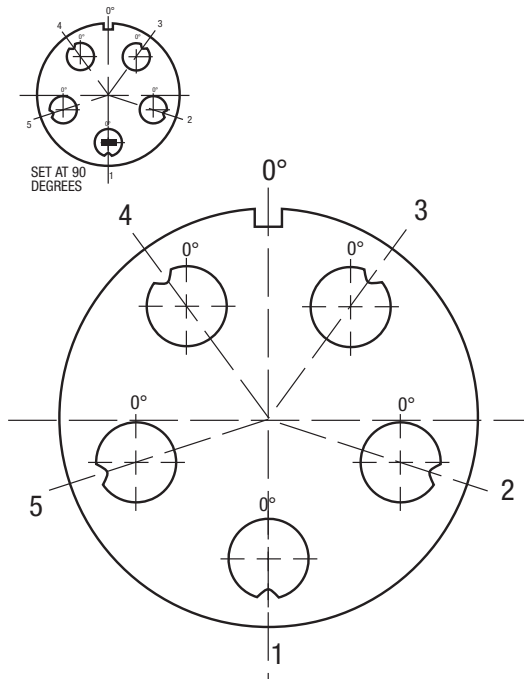


10-Station

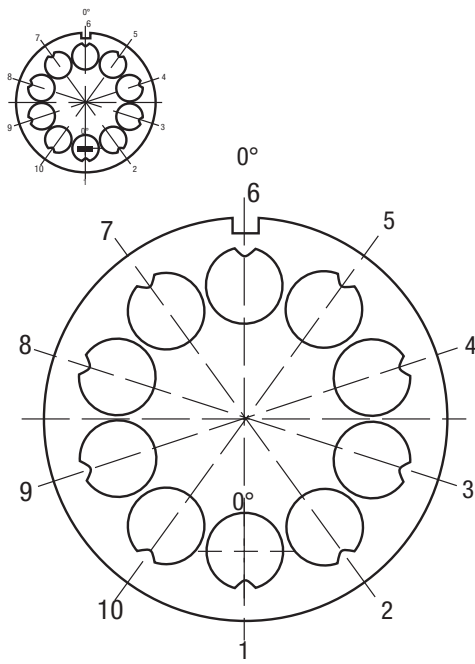

4-Station

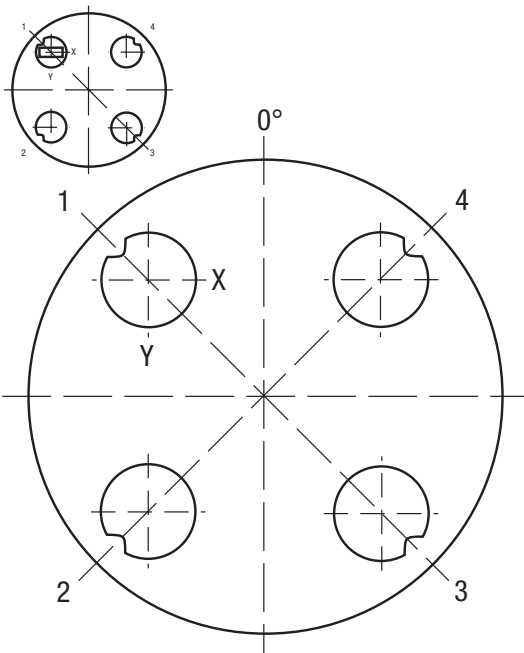

6-Station

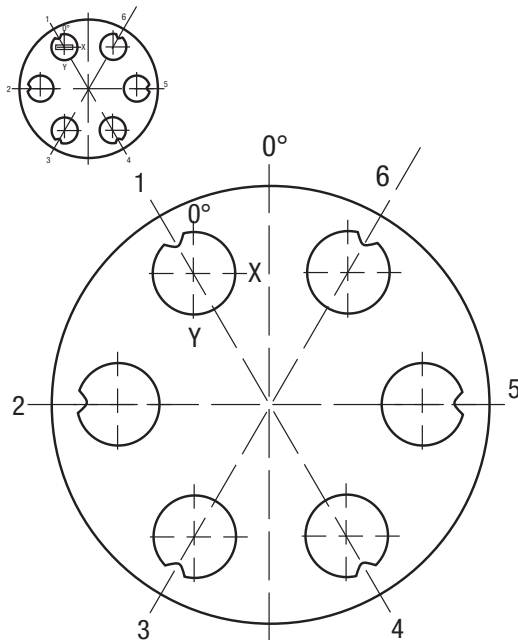

Custom angle settings


Custom angle settings are achievable. Contact your customer service representative to discuss your specific needs.



STANDARD SHAPE ANGLE SETTING


This page shows the location of the primary or (zero degree) orientation feature for punches, strippers, and dies. The orientation feature of a punch is a pin which engages with the alignment ring (Quicklock™) or punch holder (NEXT™). The orientation of a die is via a keyway, and strippers are oriented by a pair of pins.

Standard Punch

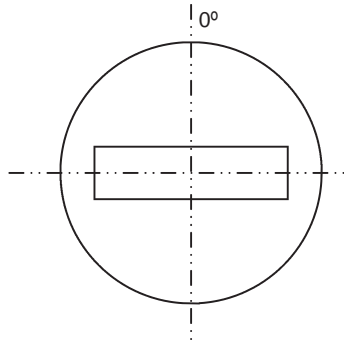


The standard punch is aligned with the alignment ring, and thus does not require an orientation feature.

Size 1 or 2 Die

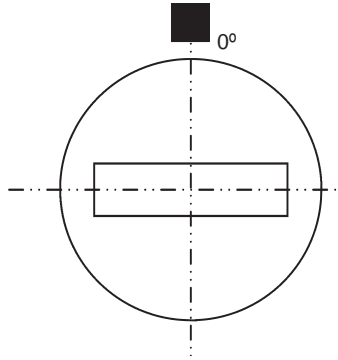


Additional keyways are provided, dependant on shape symmetry. Examples: Rectangle has two keyways and the single-D has four keyways. The default angle setting is 90 degrees, as shown.

Size 1 or 2 Stripper

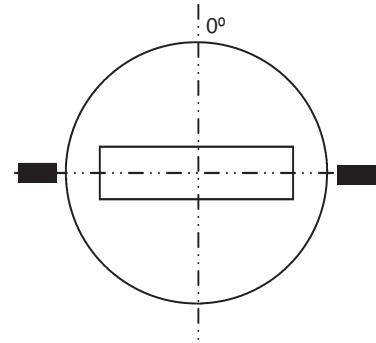


Additional pin locations are provided dependant on shape symmetry. The default angle setting is 90 degrees, as shown.

QuickLock™ Punch

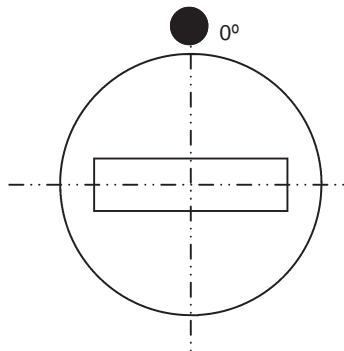


Where punch point diagonal is <math><2.000(50.80)</math> the pin is positioned on the shank of the punch. The default angle setting is 90 degrees, as shown.

QuickLock™ Punch

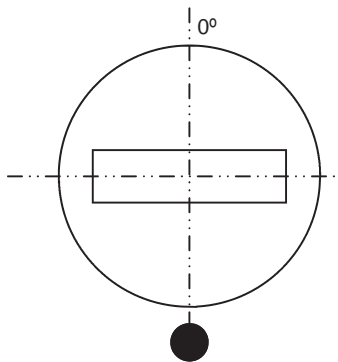

Where punch point diagonal is >math>>2.000(50.80)</math> this pin is positioned on the shoulder of the punch. The default angle setting is 90 degrees, as shown.

NEXT™ Punch

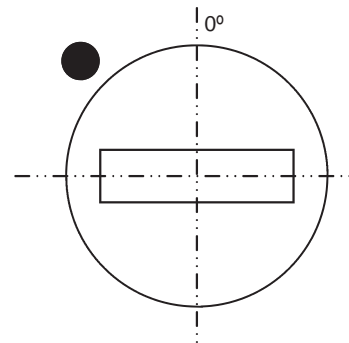

The orientation pin is positioned on the shoulder of the punch. The default angle setting is 90 degrees, as shown.




CRITICAL TOOL DIMENSIONS

			Flat (without shear)			Whisper		Rooftop	
			2.910	3.030	3.050	3.030	3.050	3.030	3.050
Overall Punch Length Inch			74.00	77.00	77.50	77.00	77.50	77.00	77.50
Overall Punch Length Millimeters									
Trumpf Style	Size 0-A	PATA_A*		-		-	-	-	-
	Size 0-B	PATB_A*		-		-	-	-	-
	Size 1	PATD_A		-		-	-	-	-
	Size 1-X	PATX_A		-	-	-	-	-	-
	Size 2	PATE_A		-		-	-	-	-
	Size 2	PATF_A		-		-	-	-	-
	Size 3	PATJ_A		-	-	-	-	-	-
QuickLock™	Size 1	PCTD_A							
	Size 2	PCTE_A							
	Size 2	PCTF_A							
	Size 2	PCTG_A							
	Size 2	PCTH_A							
NEXT™	Size 40	PBTD_A**				-			-
	Size 40	PBTE_A**				-			-
	Size 76	PBTF_A**				-			-
	Size 76	PBTG_A**				-			-
	Size 76	PBTH_A**				-			-

Standard No Charge Option - Option not available.

* Overall length when assembled into punch chuck

** Overall length when assembled into NEXT™ punch holder

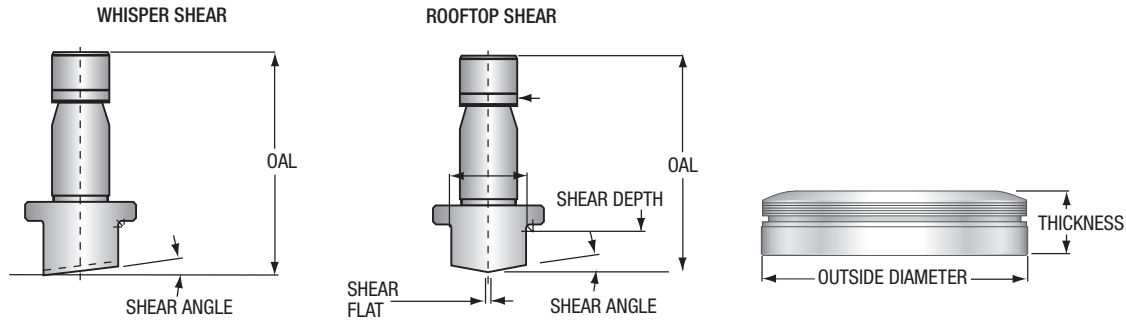

	Station	Maximum Punch Point Diagonal	Whisper Shear		Rooftop Shear		Die Dimensions	
			Depth/Angle	Shear Flat	Depth/Angle	Shear Flat	Outside Diameter	Thickness
Trumpf Style	Size 1	0.591(15.01)	5 degrees		10 degrees	0.050(1.27)	2.362(60.00)	0.709(18.00)
	Size 1	1.181(30.00)	5 degrees		5 degrees	0.050(1.27)	2.362(60.00)	0.709(18.00)
	Size 2	3.0063(76.36)	0.110(2.79)		0.110(2.79)	0.100(2.54)	3.937(100.00)	0.789(20.00)
	Size 3	4.134(105.00)	0.110(2.79)		0.110(2.79)	0.100(2.54)	5.905(150.00)	
QuickLock™	Size 1	0.643(16.33)	5 degrees		10 degrees	0.050(1.27)	2.362(60.00)	0.709(18.00)
	Size 1	1.181(30.00)	5 degrees		5 degrees	0.050(1.27)	2.362(60.00)	0.709(18.00)
	Size 2	3.000(76.20)	0.110(2.79)		0.110(2.79)	0.100(2.54)	3.937(100.00)	0.789(20.00)
NEXT™	Size 40	0.643(16.33)	5 degrees		10 degrees	0.050(1.27)		See size 1
	Size 40	1.181(30.00)	5 degrees		5 degrees	0.050(1.27)		See size 2
	Size 40	1.575(40.01)	0.110(2.79)		0.110(2.79)	0.100(2.54)		See size 2
	Size 76	3.0063(76.36)	0.110(2.79)		0.110(2.79)	0.100(2.54)		See size 2

SECTION 7

Dimensions in inches (millimeters)





visit mate.com

MATE PRECISION TOOLING

WORLDWIDE HEADQUARTERS:

1295 Lund Boulevard, Anoka, Minnesota 55303 USA
Tel 763.421.0230 Fax 763.421.0285 mate.com

EUROPEAN HEADQUARTERS:

Gablonzer Str, 25, 61440 Oberursel, Germany
Tel +49.6171.8878.000 Fax +49.6171.8878.001 mate.de

© The Mate Logo is a registered trademark of Mate Precision Tooling Inc.
Xcel, SnapLock, HexLock, DuraSteel, EasySnap, and MTG are trademarks of Mate Precision Tooling Inc.
Slug Free, Rollerball, Sheetmarker, Scissortool, and Maxima are registered trademarks of Mate Precision Tooling Inc.
Trumpf is a registered trademark of the Trumpf Group